



Workbook. **2026-2027**

GENERAL INFORMATION

Our production started off and continues to be of an artisanal nature. Our lamps are not produced in large series, from moulds or sophisticated plants but they are hand-crafted by our artisans. Slight flaws are thus not to be considered defects, but rather the typical characteristics of manual work. Catellani & Smith declares under its own responsibility that its products meet the essential requirements of EC directives and comply with EN 60598 for luminaires and related components.

Catellani & Smith lamps are built with a voltage of 230V. The pricelist specifies which luminaires are compatible with a voltage of 110V (with standard EC components and not with UL certified components) and which ones can be compatible upon request, by making some styling and technical modifications (price estimate to be provided).

Production is tested 100%: each product undergoes a thorough quality control that guarantees it is intact and fully functional. The guarantee covers the item for 2 years from the date of purchase, including the right to a replacement or to the repair of the product or parts thereof affected by manufacturing defects detected at the time of purchase or that arise over the next two years. **The guarantee does not cover any damage to luminaires caused by connection to incompatible dimmers or control and dimming systems.** Compatibility of our products with dimmers or home automation systems must be checked prior to purchase and it is the responsibility of the customer or person acting for him/her.

The guarantee does not include any refunds for the intervention of qualified staff (electrician, etc.) or costs for the installation/disassembly or costs related to equipment (such as scaffolding access platforms, scaffolding, etc.) required to access the luminaires and perform maintenance and control operations on them. It is advisable always to test the luminaires on the ground before final installation if they are to be fitted under special circumstances or connected to control and dimming systems.

In compliance with the regulations in force, **the manufacturer reserves the right to make any styling or technical changes without prior notice.** Such changes also include the type and wattage of light sources and electronic parts. These changes are due to market availability issues since it is continuously growing and evolving, and it tends to eliminate certain products in favour of others, discontinuing their production without notice (which is increasingly often the case with LED bulbs).

According to regulation 2017/1369, starting from 01/03/2022 the new energy efficiency classification comes into force, which also concerns light sources. The rating scale goes from A (maximum efficiency) to G (minimum efficiency), replacing the previous scale from A +++ to D, as required by Directive 2010/30 / EU currently in force. Based on warehouse supplies, we will update the indication of the energy class in our documentation.

In our website we will also provide the link to access all information concerning the light sources supplied: some datas (such as lumen or wattage) might vary from what mentioned in the workbook, as they are measured on the pure sources, not on our appliances.

The Catellani & Smith Workbook is designed to help and protect the customer in his/her choice of products. We therefore recommend that you read each section thoroughly, given the complexity of the electronic parts, and that you check the compatibility between the various components (such as dimmers, light sources, etc.) and contact qualified staff for the choice and installation of products.

Whilst every care has been taken in preparing this catalogue, the given information may have changed after publication, without prior notice from our side. The design and specification of products are subject to change, in the interest of improvement.

Catellani & Smith cannot accept any responsibility for the consequences of the use of the given information.

HOW TO READ THE WORKBOOK

collection

↑

here are summarized the main finishes of the products in the collection

↑

here are some extra information regarding the electrical components of the lamps (ie. power supply, dimming)

↑

Colore

[Finishes] // **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

page nr. of reference of the lamp in the related catalogue

↑

name

↑

type

↑

type of lighting source supplied

↑

type or socket of the lighting source supplied

↑

lumen or candelas referring to the source included

↑


RA referring to the source included

↑

it refers to the type of driver supplied

↑

p. 47



drawing with main dimensions

Ettorino / table lamp	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
ETRT / colourful (white/red/yellow/blue) / red man silhouette / nickel dimmer / blue wire	110-240V	constant current LED 300 mA	COB LED	1x10W	1441	2700	>80	E	constant current plug driver*	push included (memory last step)
ETRTB / black / red man silhouette / nickel dimmer / black wire										
ETRTW / white / red man silhouette / nickel dimmer / blue wire										

code / finish / model / infos

↓

it refers to the voltage of the standard model (usually 230V) and the possibility to have it 110V according to the following list:
110V-240V: the lamp is already compatible for both voltages;
110V or 230V: the lamp can be supplied in both voltages, in some cases without bulb when 110V;
110V version on request: the standard lamp is not 110V, but it can be supplied on request with some modifications;
230V: the lamp is available for this voltage only

↓

wattage detail referring to the source supplied

↓

Kelvin degrees referring to the source supplied


↓

energy class referring to the source included

↓


dimming / dimmer / on/off indicates if the lamp is dimmable (if yes, how you can dim it) or else if the dimming (dimmer) is included

↓

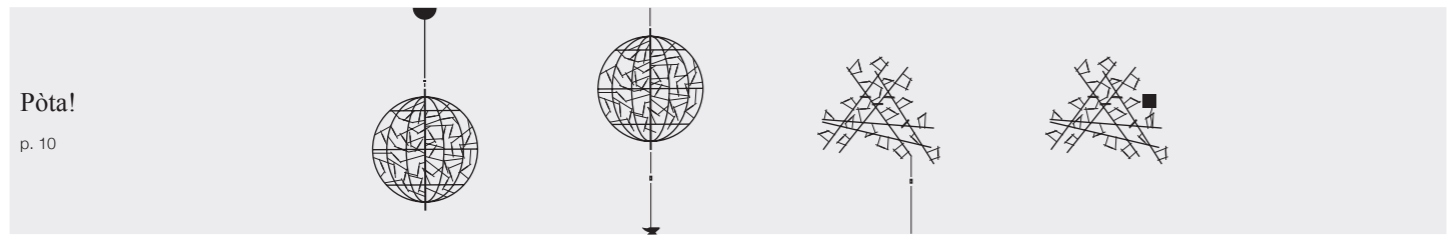

Pota!
p. 10

Pota! Pota! Pota! Pota!

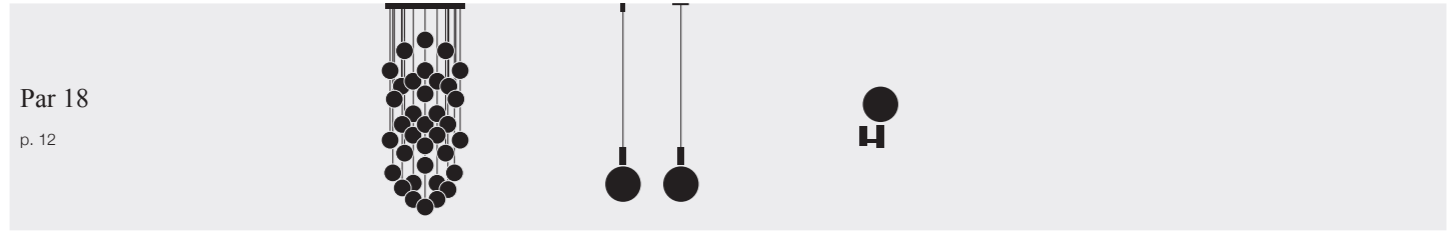


Par 18
p. 12

Par 18 Chandelier Par 18 (mod. JC/IC) Par 18




SimilDesign
p. 14

Ensò (table) Ensò (wall) Sfera Cono Atman

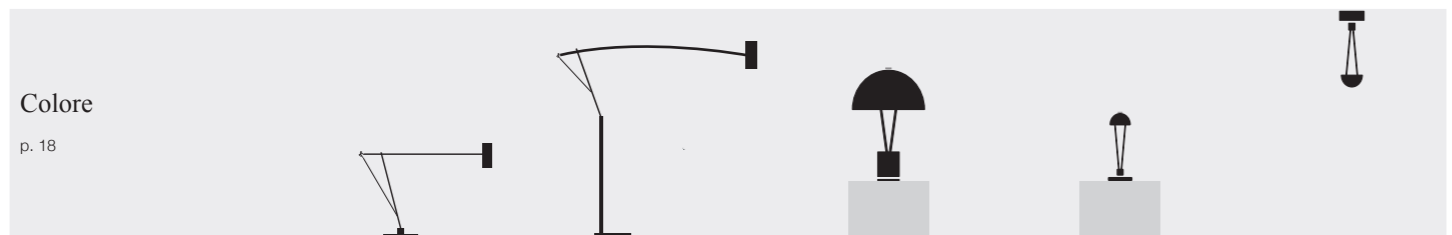


Colore
p. 18

Ettorino Ettorino BIG Ale BIG Ale Ale

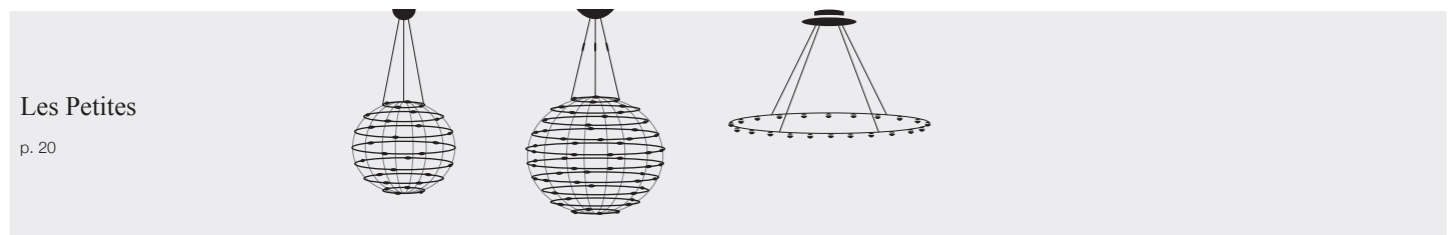


Les Petites
p. 20

Petits Bijoux (28) Petits Bijoux (56) Petites Lentilles

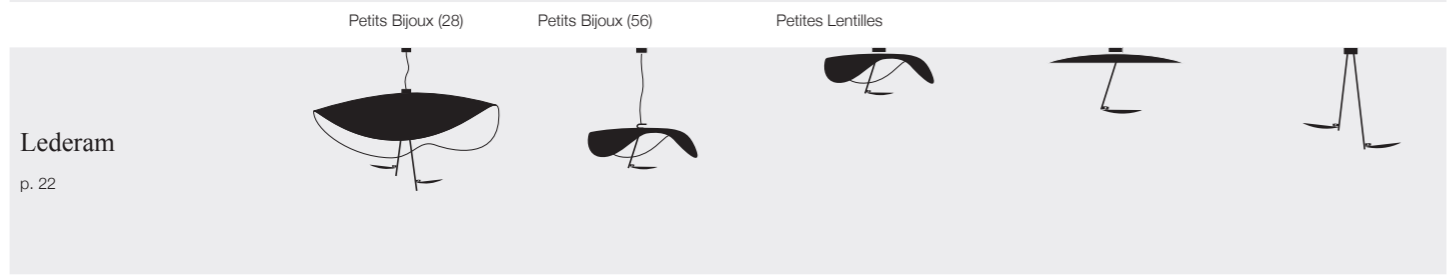


Lederam
p. 22


Lederam Manta S2 Lederam Manta S1 Lederam Manta CWS1 Lederam C150/180 Lederam C2

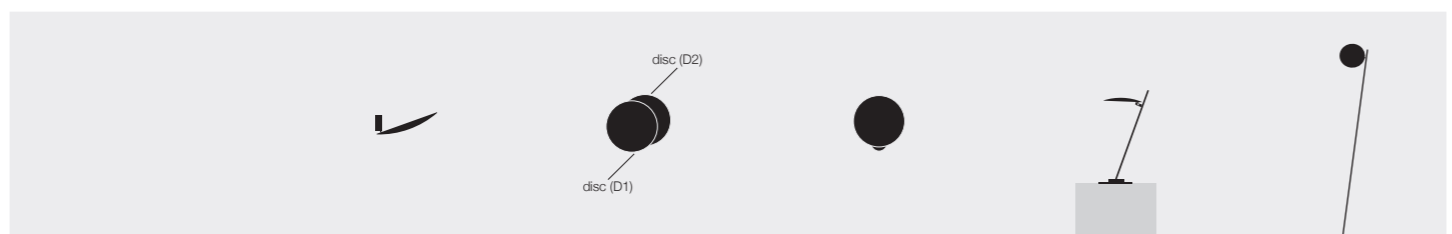

Lederam WF Lederam W Lederam W1 Lederam T1 Lederam F0

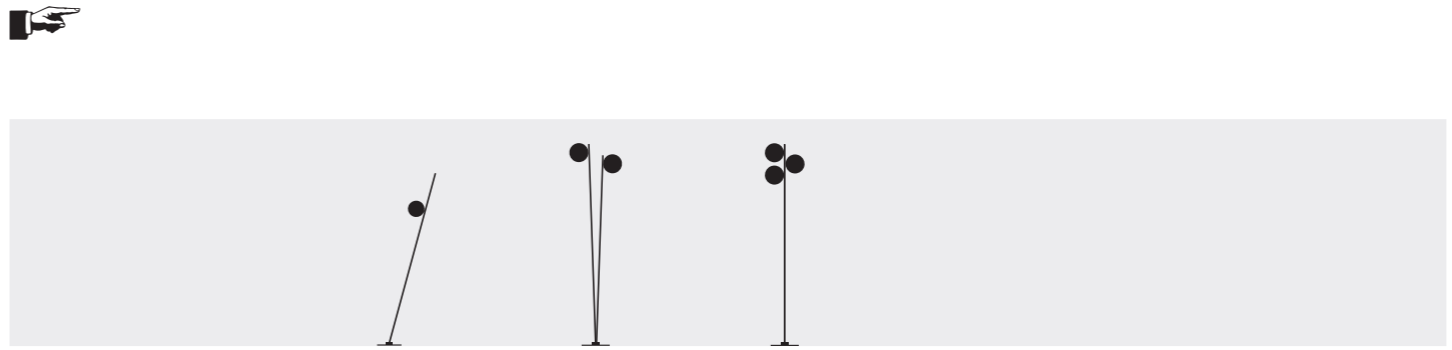


Lederam F1 Lederam F2 Lederam F3

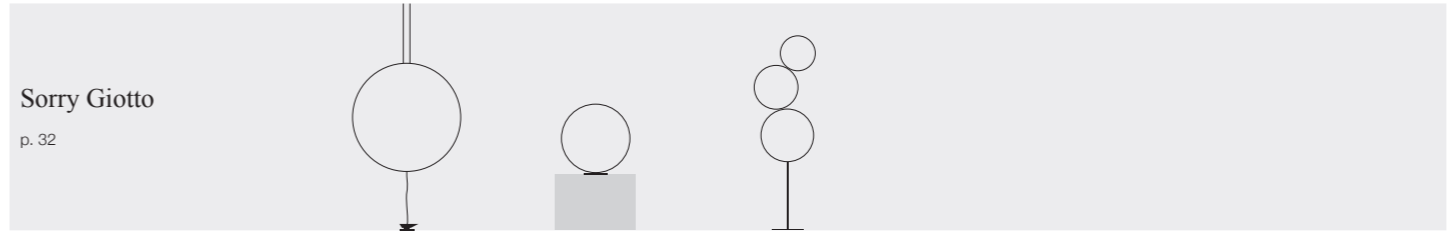


Sorry Giotto
p. 32

Sorry Giotto Sorry Giotto Sorry Giotto

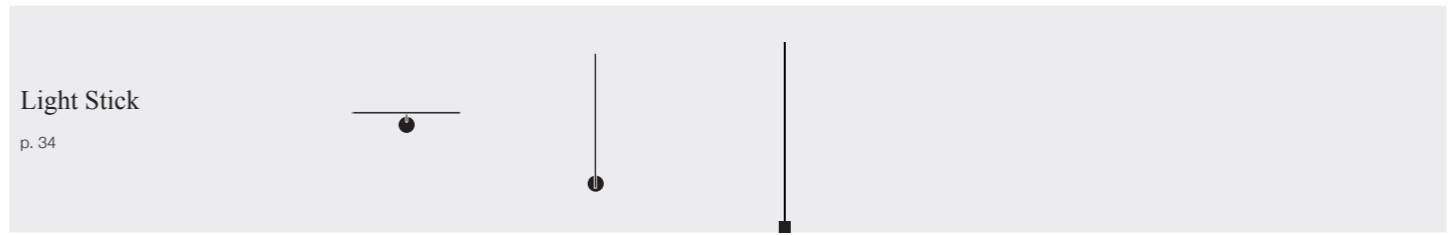


Light Stick
p. 34

Light Stick Light Stick Light Stick

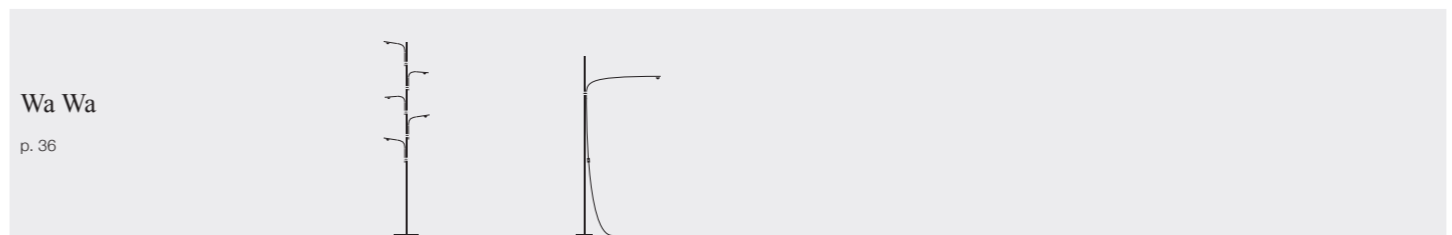


Wa Wa
p. 36

Wa Wa Uau

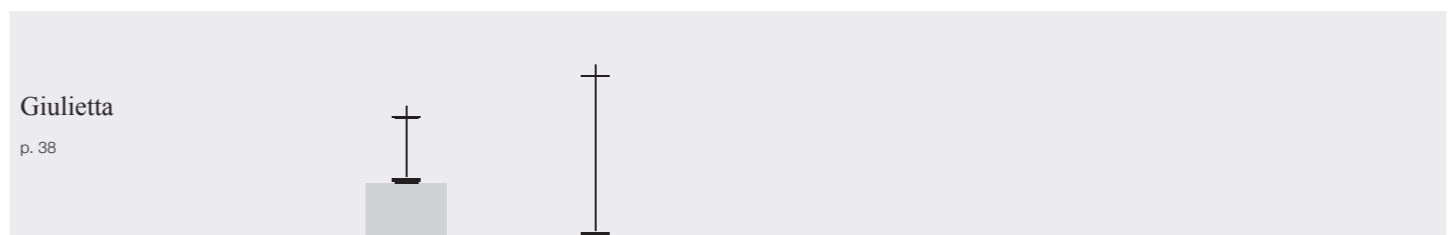


Giulietta
p. 38

Giulietta BE Giulietta BE

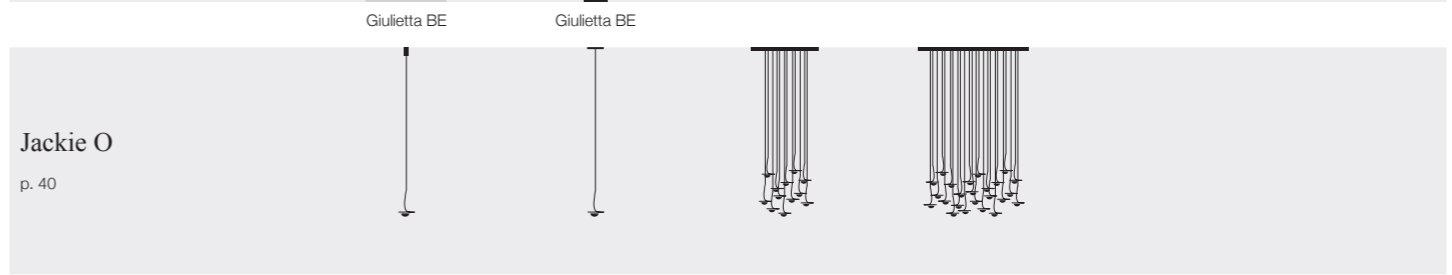


Jackie O
p. 40

Jackie O (mod. JC) Jackie O (mod. IC) Jackie O Chand. (6/9/12) Jackie O Chand. (15/20/24)

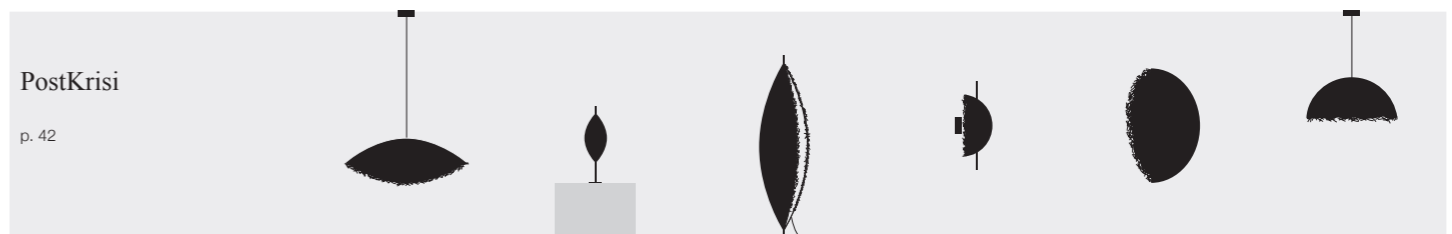

PostKrisi
p. 42


PostKrisi 50-51-52 Malagolina PostKrisi 100 PostKrisi 21-40 PostKrisi 70 PostKrisi 49

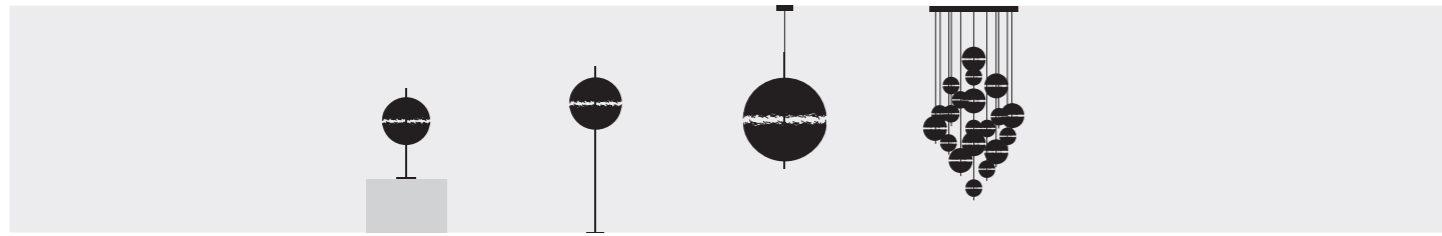

PostKrisi 61 PostKrisi 64 PostKrisi 65-66-67 PostKrisi Chandelier

Fil de Fer


p. 50

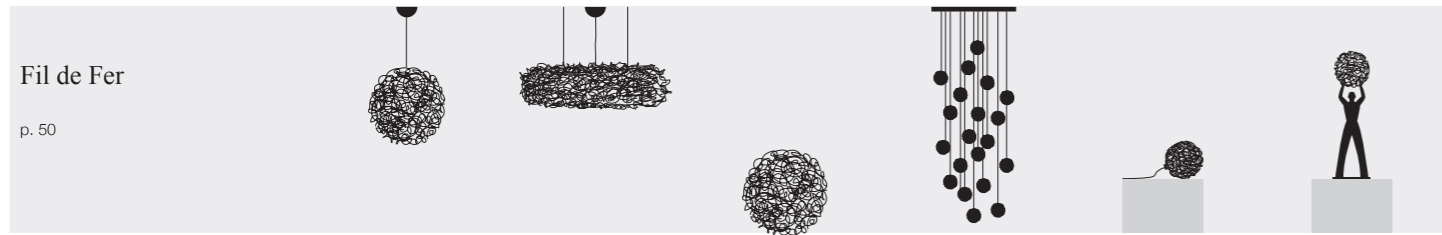

Fil de Fer Nuvola Fil de Fer Sweet Light Chandelier Sweet Light Uomo della Luce S

Lucenera

p. 54

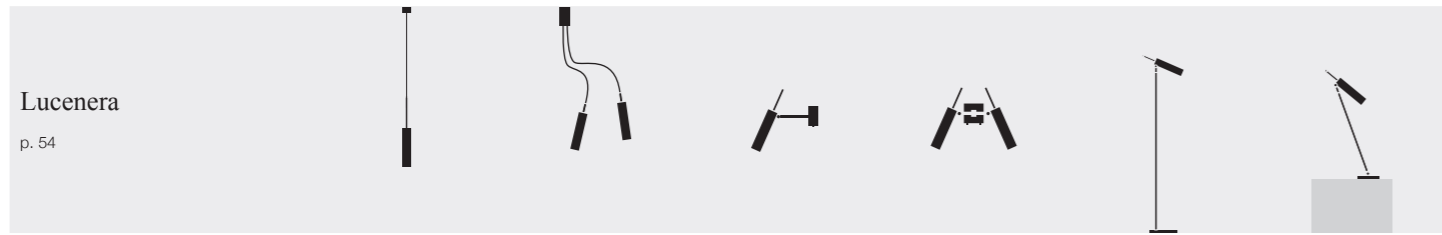


Lucenera 504 Lucenera 206 Lucenera 502 Lucenera 503 Lucenera 506 Lucenera 500

Stchu-Moon

p. 56




Bellatrix Stchu-Moon 02 Stchu-Moon 02 (with bulbs) Stchu-Moon Chandelier Stchu-Moon 05

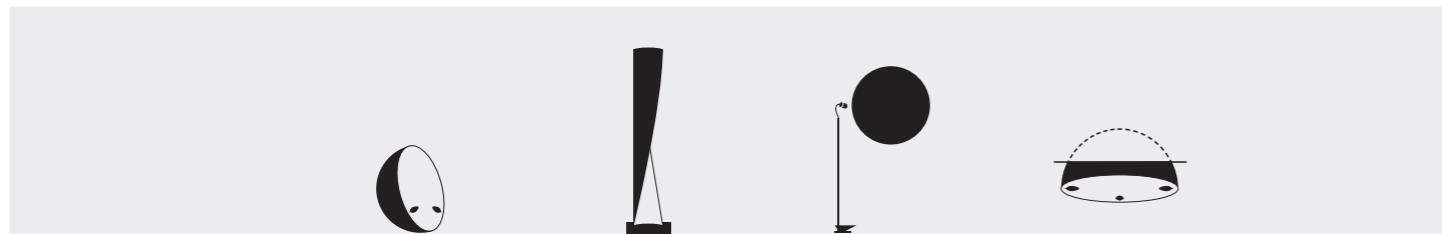

Stchu-Moon 01 Stchu-Moon 09 Stchu-Moon 08 Stchu-Moon SR

Punti Luminosi


p. 62

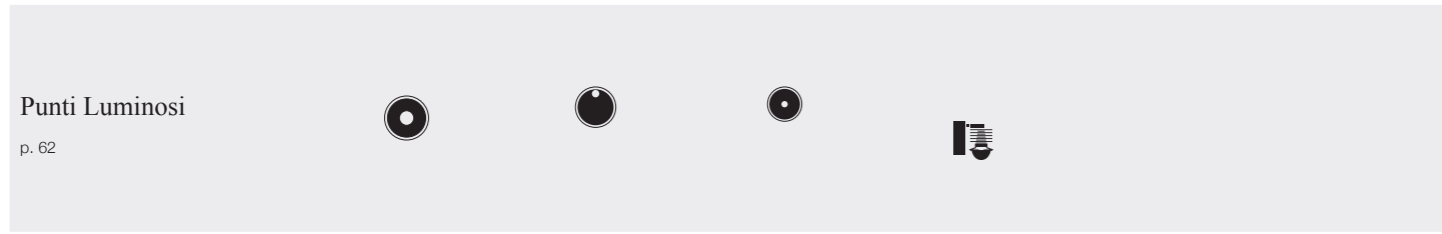


Stchu-Moon R Pepita 102 Pepita 65 EC 301

Macchina della Luce

p. 66

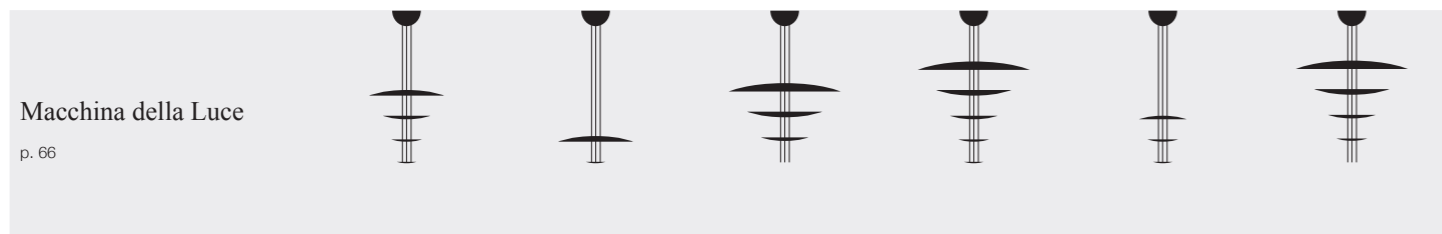


mod. A mod. B mod. C mod. D mod. E mod. F

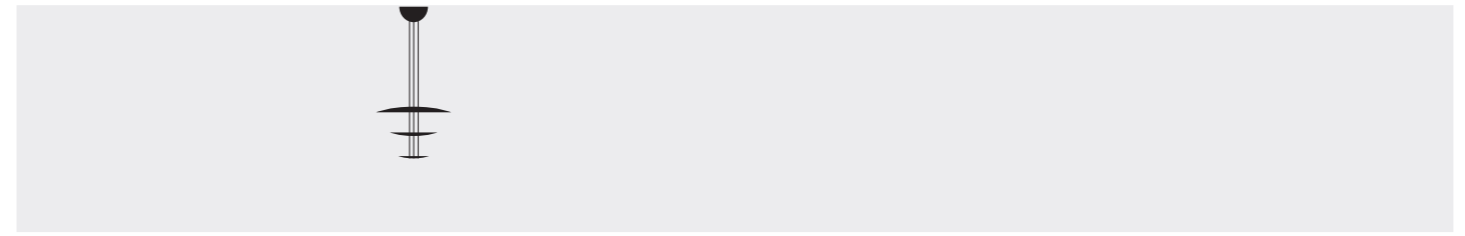


mod. I

Luci d'Oro


p. 70

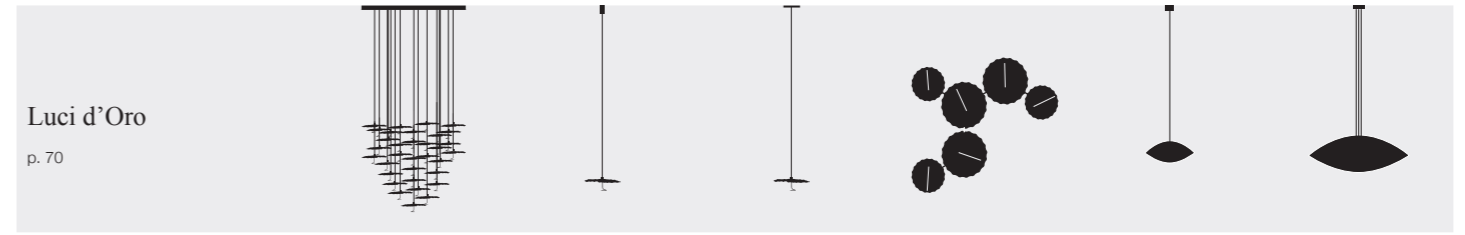

Gold Moon Chandelier Gold Moon (mod. JC) Gold Moon (mod. IC) Gold Moon Malagola Malagola (with bulbs)

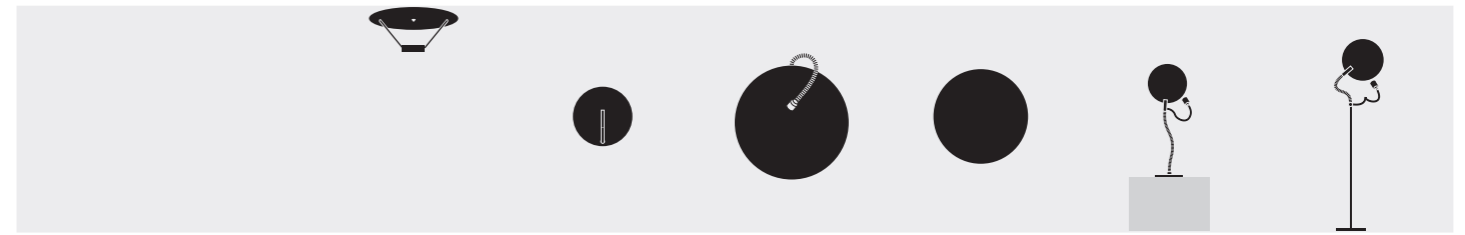


Disco Luna Luna Piena Francesca Luce d'Oro Luce d'Oro

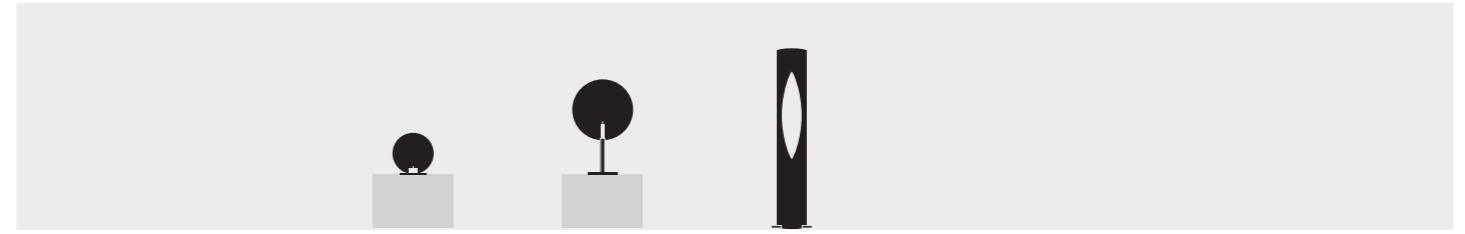


Luna Gemma Colonna

Turciù

p. 78

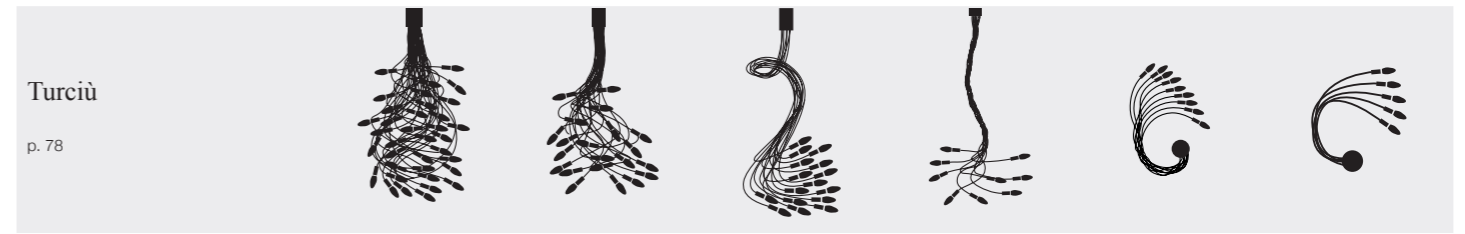


Turciù (36) Turciù (21) Turciù (16) Turciù (9) Turciù (9) Turciù (5)

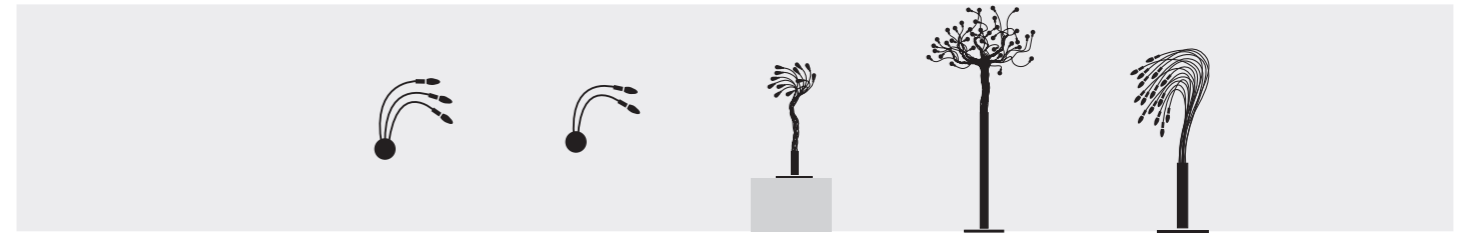


Turciù (3) Turciù (2) Bonsai Albero della Luce Sottovento

Oggetti Senza Tempo

p. 84

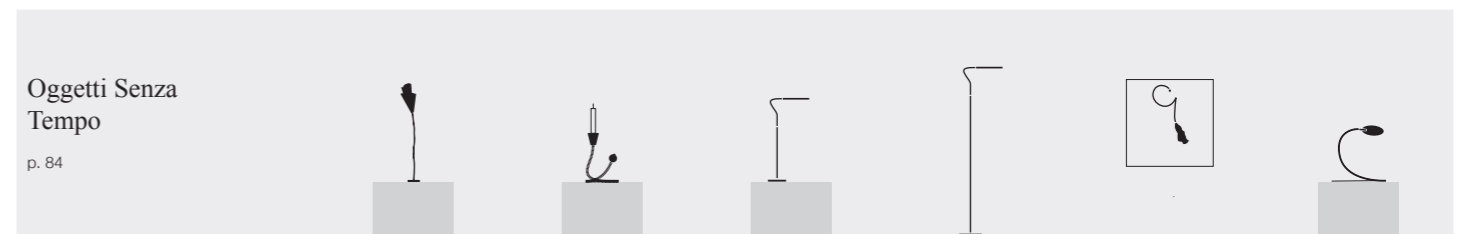

For You Miracolo Lola Lola Luce che dipinge Herem

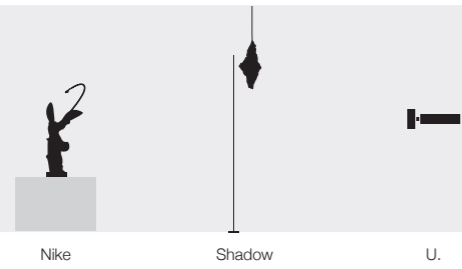


Nike

Shadow

U.

CicloItalia

p. 88

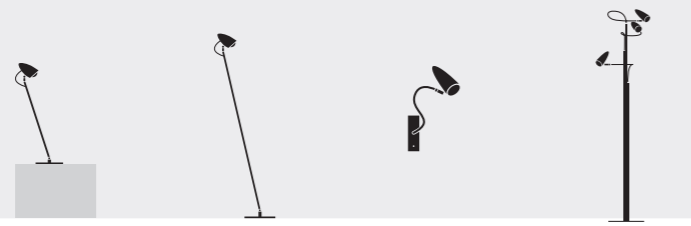

CicloItalia


CicloItalia

CicloItalia (with flex)

CicloItalia (with flex)

Other Smiths

p. 92




Talismano

Alchemie

Medousê (outdoor)

p. 94




Medousê

Medousê

More (outdoor)

p. 96

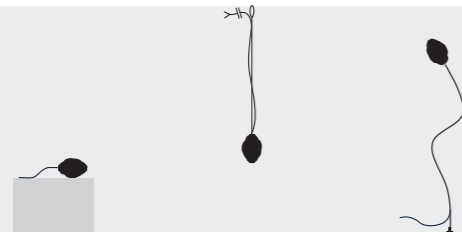


More

More

More

Sypha

p. 98

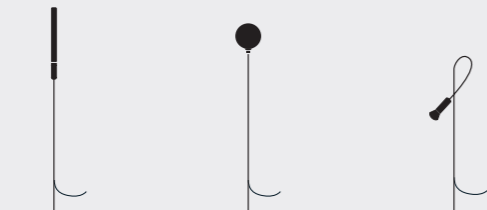


Syphasera

Syphasera

Syphaduepassi

Fil de Fer

p. 100

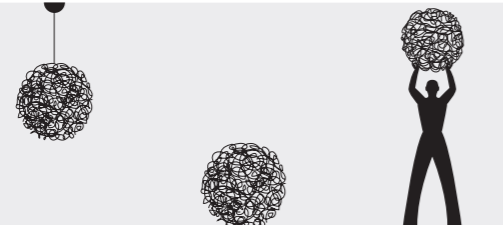

Fil de Fer

Fil de Fer

Uomo della Luce XXL



Limited Edition

p. 102



Trenta

Technical information

p. 104

Lederam: colour combinations and details

p. 105

Outdoor accessories

p. 116

Mains voltage LED

p. 108

Medousê installation suggestions

p. 117

Chandelier

p. 110

Installation suggestions for Sypha/More

p. 118

Macchina della Luce LED boards

p. 112

PSU (Power Supply Unit) Kits for 24Vdc JC/IC pendants

p. 120

Stchu-Moon LED boards

p. 113

Drivers @24Vdc

p. 121

Outdoor: Gel box system

p. 114

Instructions for the connection of multiple recessed lamps

p. 122

Outdoor: Quick connectors system

p. 115

Dimming wiring diagrams

p. 123

Outdoor: Fil de Fer


p. 115

Pòta!

[Finishes] // **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation. (**) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.


p. 41



Pòta! / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
POTA5S / Ø 50 cm / brass structure/black details / blue wire / white base	230V (available 110V DALI dimmable)	constant voltage 24V LED	LED board	18x0,7W 12,6W	2430	2700	91	D	constant voltage driver	Triac*
POTA8S / Ø 85 cm / brass structure/black details / blue wire / white base				36x0,7W 25,2W	4860					
POTA5S24 / Ø 50 cm / brass structure/black details / blue wire / white base	230V (available 110V DALI dimmable)	constant voltage 24V LED	LED board	18x0,7W 12,6W	2160	2400	84	E	constant voltage driver	Triac*
POTA8S24 / Ø 85 cm / brass structure/black details / blue wire / white base				36x0,7W 25,2W	4320					

p. 45

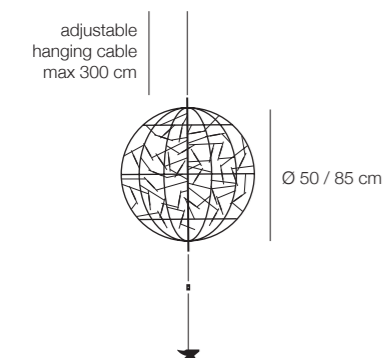


Pòta! / pendant lamp with anvil and plug driver

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
POTA5F / Ø 50 cm / brass structure/black details / steel cable ^(s) / blue wire ^(el) / black dimmer and anvil	110-240V	constant voltage 24V LED	LED board	18x0,7W 12,6W	2430	2700	91	D	constant voltage plug driver*	push included (memory last step)**
POTA8F / Ø 85 cm / brass structure/black details / steel cable ^(s) / blue wire ^(el) / black dimmer and anvil				36x0,7W 25,2W	4860					
POTA5F24 / Ø 50 cm / brass structure/black details / steel cable ^(s) / blue wire ^(el) / black dimmer and anvil	110-240V	constant voltage 24V LED	LED board	18x0,7W 12,6W	2160	2400	84	E	constant voltage plug driver*	push included (memory last step)**
POTA8F24 / Ø 85 cm / brass structure/black details / steel cable ^(s) / blue wire ^(el) / black dimmer and anvil				36x0,7W 25,2W	4320					

(s) suspension cable / (el) electrical cable

cable from lamp to dimmer 30 cm
cable from dimmer to plug driver 300 cm

p. 49



Pòta! / wall lamp with plug driver

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
POTAWF / brass structure/black details / blue wire / black dimmer	110-240V	constant voltage 24V LED	LED board	20x0,7W 14W	2800	2700	91	D	constant voltage plug driver*	push included (memory last step)**
POTAWF24 / brass structure/black details / blue wire / black dimmer	110-240V	constant voltage 24V LED	LED board	20x0,7W 14W	2400	2400	84	E	constant voltage plug driver*	push included (memory last step)**

H ledge 25 cm ca.
cable from lamp to dimmer 30 cm
cable from dimmer to plug driver 300 cm




Pòta! / wall lamp

POTAW / brass structure/black details / white base

POTAW24 / brass structure/black details / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (available 110V DALI dimmable)	constant voltage 24V LED	LED board	20x0,7W 14W	2800	2700	91	D	constant voltage driver	Triac*
230V (available 110V DALI dimmable)	constant voltage 24V LED	LED board	20x0,7W 14W	2400	2400	84	E	constant voltage driver	Triac*

Pendant version available on request.

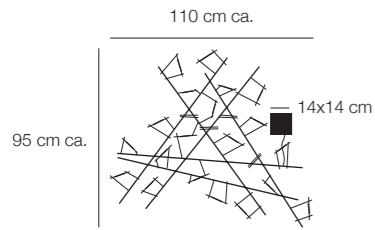

H ledge 25 cm ca.

Par 18

[Finishes] // **Satin Steel** - the standard modular metal bases are composed of a satin steel plate mounted on a white lacquered metal frame and fixed to it by nickel square-head screws. On request we can supply the plate white matt lacquered as the frame or in different RAL colours.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 57



Par 18 Chandelier / pendant lamp

satin steel base Ø 78 cm / nickel jack / black wires

CP18358C / transparent irregular/golf glass Ø 8 cm


CP183516C / transparent irregular/golf glass Ø 16 cm

CP1835168C / transparent irregular/golf glass 25x Ø 16 cm -10x Ø 8 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 230V	constant voltage 24V LED	LED board	35x1,7W 59,5W	6020	2700	91	F	constant voltage driver	Triac*

base Ø 78 cm / shades Ø 8 or 16 cm / H max 300 cm not adjustable

p. 61

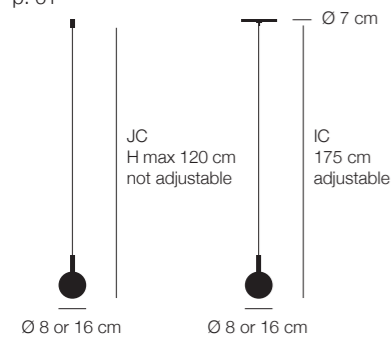

Par 18 / mod. JC or IC / pendant/recessed lamp for plasterboard ceiling

P188JC / transp. irregular/golf glass Ø 8 cm / nickel jack / black wire

P1816JC / transp. irregular/golf glass Ø 16 cm / nickel jack / black wire

P188IC / transp. irregular/golf glass Ø 8 cm / nickel plate with cable locker / black wire

P1816IC / transp. irregular/golf glass Ø 16 cm / nickel plate with cable locker / black wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	constant voltage 24V LED	LED board	1x1,7W	172	2700	91	F	not included available on request	-

installation hole mod. JC Ø 1,25 cm
installation hole mod. IC Ø 5,5 cm
max plasterboard thickness 1,25 cm



Par 18 / wall lamp

P18W / transp. irregular/golf glass Ø 16 cm / white base / brass joint
 P18B / transp. irregular/golf glass Ø 16 cm / black base / brass joint

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available not dimmable)	constant current LED 270 mA	COB LED	1x9W	1296	2700	>80	E	constant current driver	Triac*

SimilDesign

[*Finishes*] // **Hand painting** is chosen for its deliberate textured effect and uniqueness of result. Any irregularities or unevenness in the coating cannot be considered defect, but rather a hallmark of the artisanal crafting process. / **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*****) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard. / (******) 230V version available with not interchangeable EU plug only - memory 100%. / (*******) The remote control provided allows to switch on and dim the lamp. The system (we use Casambi) can be programmed and controlled also via app.



Ensō / table lamp

ENS0 / blue / brass base / black dimmer and wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant voltage 24V LED	LED board	11x1,6W 17,6W	1749	2700	>90	F	plug driver*	push included (memory last step)



Ensō / wall lamp

ENSOW / blue / blue base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available on request)	constant voltage 24V LED	LED strip	89W	8660	2700	90	F	constant voltage driver	wireless (remote control included)***

Ø 20 cm ca.



Sfera / wall lamp


	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SFWNC / nickel mirrored	230V (110V available DALI dimmable)	constant current LED 450 mA	COB LED	1x15W	2187	2700	80	D	constant current driver	Triac

204 cm



Cono / wall lamp with plug driver

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CNW / blue/internal irregular with gold coloured leaf / black wire	110-240V	constant current LED 450 mA	COB LED	15W	2187	2700	80	D	constant current plug driver*	push included (upwards)
		low voltage LED 12Vdc	G4 bulb	0,8W	70	2700	82	F		on/off (downwards)



Atman / table lamp


	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
AT / oval crystal glass / nickel base / blue wire / black dimmer	110-240V**	constant current LED 350 mA	LED board	1x1W	149	2700	85	D	constant current plug driver***	push included (memory last step)

Colore

[Finishes] // **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 91




Ettorino / table lamp

ETRT / colourful (white/red/yellow/blue) / red man silhouette / nickel dimmer / blue wire
 ETRTB / black / red man silhouette / nickel dimmer / black wire
 ETRTW / white / red man silhouette / nickel dimmer / blue wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 300 mA	COB LED	1x10W	1441	2700	>80	E	constant current plug driver*	push included (memory last step)

p. 93

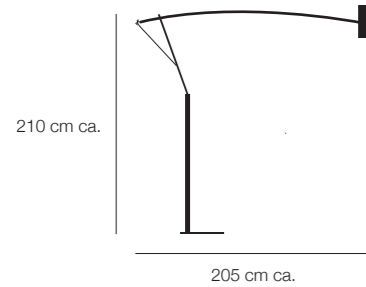


Ettorino BIG / standing lamp

ETRBIG / colourful (white/red/yellow/blue) / red man silhouette / black wire
 ETRBIGB / black / red man silhouette / black wire
 ETRBIGW / white / red man silhouette / black wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 350 mA	LED board	1x1W	149	2700	85	D	constant current plug driver*	on/off (upwards)
	constant current LED 450 mA	COB LED	1x15W	2187	2700	>80	D		push included (downwards)

p. 97




Ale BIG / table lamp

ALEBIG / colourful (white/red/yellow/blue) / black fly and wire
 ALEBIGFL / fluo (orange/yellow/magenta) / black fly and wire
 ALEBIGB / black / white fly / black wire
 ALEBIGW / white / black fly and wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED @450 mA	COB LED	1x15W	2187	2700	>80	D	constant current plug driver*	push included

p. 99



Ale / battery table lamp

ALEBT / colourful (white/red/yellow/blue) / black fly

ALEBTFL / fluo (orange/blue/yellow/magenta) / black fly

ALEBTB / black / white fly

ALEBTW / white / black fly

battery	source	type	watt	lumen	K	CRI	en. class	battery charger	dimming
Li-ION 3,7V 4100 mAh	constant current LED 500 mA	LED board	1x1W	146	2700	84	D	input 110/240V output 5V@1,2 A (EU or UK plug only)	on/off switch

p. 101



Ale / ceiling lamp

ALEC / colourful (white/red/yellow/blue)

ALECFL / fluo (orange/blue/yellow/magenta)

ALECB / black

ALECW / white


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available not dimnable)	constant current LED 270 mA	COB LED	1x9W	1296	2700	>80	E	constant current driver	Triac

Les Petites

[*Finishes*] // **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (**) The remote control provided allows to switch on and dim independently the LED strip on the base and the LEDs on the oval. The system (we use Casambi) can be programmed and controlled also via app. / (***) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 105

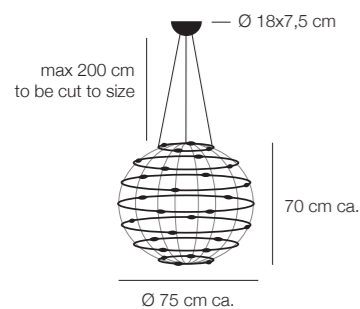


Petits Bijoux / pendant lamp

PB28 / untreated brass rings / white base / transparent covers with brass clips

*110V version available with white base Ø 21x10,5 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V* or 240V	constant voltage 24V LED	LED board	28x1,1W 30,8W	1764	2700	90	G	constant voltage driver	Triac***

p. 105

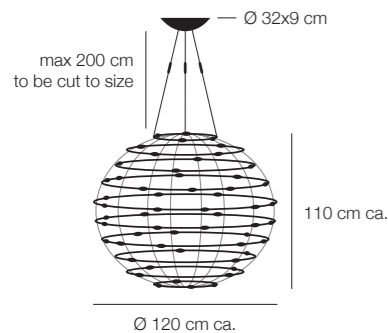


Petits Bijoux / pendant lamp

PB56 / untreated brass rings / white base / transparent covers with brass clips

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	constant voltage 24V LED	LED board	56x1,1W 61,6W	3528	2700	90	G	constant voltage driver	Triac***

weight 13 kg

p. 109

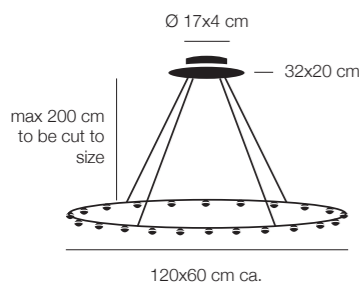

Petites Lentilles / pendant lamp

PL22 / untreated brass oval / white base / transparent lens with brass holder


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	constant voltage 24V LED	low voltage LED strip (directed upwards)	1x4W	475	3000	80	G	constant voltage driver	wireless independent (remote control included)**
		LED board	22x1,1W 24,2W	1386	2700	90			

weight 3,6 kg

Lederam

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) Mains voltage LED boards and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED. Some dimmers on the market have a NO button (Normally Open) or are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes. Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available. It is important to note that during adjustment the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer. Low voltage DALI or 1...10V versions available on request. / (**) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 113

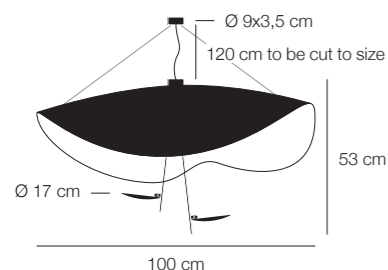

Lederam Manta S2 / pendant lamp

LS23 / shade black/gold / black rods and caps / gold discs / black bases

LS24 / shade black/copper / black rods and caps / copper discs / black bases

LS25 / shade white/white / gold rods and caps / white discs / white bases


LS26 / shade white/gold / satin rods and caps / white discs / white bases

LS28 / shade white/white / satin rods and caps / white discs / white bases

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	mains voltage LED	LED board	2x15W 30W	3100	2700	80	F		Triac/IGBT*
(110V)	(mains voltage LED)	(LED board)	(2x14W 28W)	(3080)	(2700)	(80)	(A+)		(Triac/IGBT*)

weight 5,5 kg

p. 114




Lederam Manta S1 / pendant lamp

- LS13 / shade black/gold / black rod with gold cap / gold disc / black base
- LS14 / shade black/copper / black rod with copper cap / copper disc / black base
- LS15 / shade white/white / gold rod and cap / white disc / white base
- LS16 / shade white/gold / satin rod with gold cap / white disc / white base
- LS18 / shade white/white / satin rod with gold cap / white disc / white base
- LS110 / shade white/white / white rod with gold cap / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	mains voltage LED	LED board	1x15W	1550	2700	80	F	-	Triac/IGBT*
(110V)	(mains voltage LED)	(LED board)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(Triac/IGBT*)

weight 2 kg

p. 117




Lederam Manta CWS1 / ceiling or wall lamp

- LCWS13 / shade black/gold / black rod with gold cap / gold disc / black base
- LCWS14 / shade black/copper / black rod with copper cap / copper disc / black base
- LCWS15 / shade white/white / gold rod and cap / white disc / white base
- LCWS16 / shade white/gold / satin rod with gold cap / white disc / white base
- LCWS18 / shade white/white / satin rod with gold cap / white disc / white base
- LCWS110 / shade white/white / white rod with gold cap / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	mains voltage LED	LED board	1x15W	1550	2700	80	F	-	Triac/IGBT*
(110V)	(mains voltage LED)	(LED board)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(Triac/IGBT*)

p. 119




Lederam C180 / ceiling lamp

- LC1803 / shade black/gold / black rod with gold cap / gold disc / black base
- LC1804 / shade black/copper / black rod with copper cap / copper disc / black base
- LC1805 / shade white/white / gold rod and cap / white disc / white base
- LC1806 / shade white/gold / satin rod with gold cap / white disc / white base
- LC1808 / shade white/white / satin rod with gold cap / white disc / white base
- LC18010 / shade white/white / white rod with gold cap / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	mains voltage LED	LED board	1x15W	1550	2700	80	F	-	Triac/IGBT*
(110V)	(mains voltage LED)	(LED board)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(Triac/IGBT*)

p. 119




Lederam C150 / ceiling lamp

- LC1503 / shade black/gold / black rod with gold cap / gold disc / black base
- LC1504 / shade black/copper / black rod with copper cap / copper disc / black base
- LC1505 / shade white/white / gold rod and cap / white disc / white base
- LC1506 / shade white/gold / satin rod with gold cap / white disc / white base
- LC1508 / shade white/white / satin rod with gold cap / white disc / white base
- LC15010 / shade white/white / white rod with gold cap / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	mains voltage LED	LED board	1x15W	1550	2700	80	F	-	Triac/IGBT*
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(Triac/IGBT*)

p. 120




Lederam C2 / ceiling lamp

- LC22 / black discs / satin rods and caps / black base
- LC23 / gold discs / black rods and caps / black base
- LC24 / copper discs / black rods and caps / black base
- LC25 / white discs / gold rods and caps / white base
- LC26 / white discs / satin rods and caps / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	mains voltage LED	LED board	2x15W 30W	3100	2700	80	F	-	Triac/IGBT*
(110V)	(mains voltage LED)	(LED board)	(2x14W 28W)	(3080)	(2700)	(80)	(A+)	-	(Triac/IGBT*)

p. 121




Lederam WF / wall lamp

- LWF171 / black disc / black base
- LWF173 / gold/white disc / white base
- LWF174 / copper/white disc / white base
- LWF176 / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	mains voltage LED	LED board	1x15W	1550	2700	80	F	-	Triac/IGBT*
(110V)	(mains voltage LED)	(LED board)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(Triac/IGBT*)

p. 121




Lederam WF / wall lamp

- LWF251 / black disc / black base
- LWF253 / gold/white disc / white base
- LWF254 / copper/white disc / white base
- LWF256 / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	mains voltage LED	LED board	1x15W	1550	2700	80	F	-	Triac/IGBT*
(110V)	(mains voltage LED)	(LED board)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(Triac/IGBT*)

p. 123




Lederam W / wall lamp

- LW171 / disc D1 black/copper - disc D2 copper/black / black base
- LW172 / disc D1 black/gold - disc D2 gold/black / black base
- LW173 / disc D1 gold/gold - disc D2 gold/white / white base
- LW174 / disc D1 copper/copper - disc D2 copper/white / white base
- LW175 / disc D1 white/gold - disc D2 gold/white / white base
- LW176 / disc D1 white/copper - disc D2 copper/white / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	mains voltage LED	LED board	1x15W	1550	2700	80	F	-	Triac/IGBT*
(110V)	(mains voltage LED)	(LED board)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(Triac/IGBT*)

p. 123




Lederam W / wall lamp

- LW251 / disc D1 black/copper - disc D2 copper/black / black base
- LW252 / disc D1 black/gold - disc D2 gold/black / black base
- LW253 / disc D1 gold/gold - disc D2 gold/white / white base
- LW254 / disc D1 copper/copper - disc D2 copper/white / white base
- LW255 / disc D1 white/gold - disc D2 gold/white / white base
- LW256 / disc D1 white/copper - disc D2 copper/white / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	mains voltage LED	LED board	1x15W	1550	2700	80	F	-	Triac/IGBT*
(110V)	(mains voltage LED)	(LED board)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(Triac/IGBT*)

p. 124




Lederam W1 / wall lamp

- LW1171 / black disc / black base
- LW1173 / gold/black disc / black base
- LW1174 / copper/black disc / black base
- LW1176 / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	mains voltage LED	LED board	1x15W	1550	2700	80	F	-	Triac/IGBT*
(110V)	(mains voltage LED)	(LED board)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(Triac/IGBT*)

p. 124




Lederam W1 / wall lamp

- LW1251 / disc Ø 25 cm black / black base
- LW1253 / disc Ø 25 cm gold/black / black base
- LW1254 / disc Ø 25 cm copper/black / black base
- LW1256 / disc Ø 25 cm white / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	mains voltage LED	LED board	1x15W	1550	2700	80	F	-	Triac/IGBT*
(110V)	(mains voltage LED)	(LED board)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(Triac/IGBT*)

p. 126




Lederam T1 / table lamp

- LT12LVO / black disc / satin rod and cap / black base/cable/dimmer
- LT13LVO / gold disc / black rod and cap / black base/cable/dimmer
- LT14LVO / copper disc / black rod and cap / black base/cable/dimmer
- LT15LVO / white disc / gold rod and cap / white base / black dimmer / blue cable
- LT16LVO / white disc / satin rod and cap / white base / black dimmer / blue cable

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 300 mA	COB LED	1x10W	1441	2700	>80	E	plug driver**	push included (memory last step)


p. 127

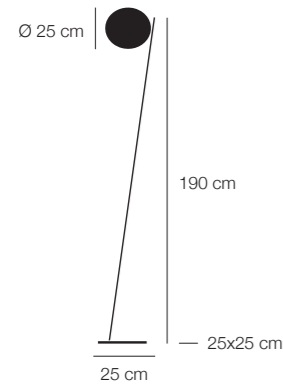**Lederam F0** / standing lamp

LF012LVO / brass disc / black rod and cap / black base/cable/dimmer
 LF02LVO / black disc / satin rod and cap / black base/cable/dimmer
 LF03LVO / gold disc / black rod and cap / black base/cable/dimmer
 LF04LVO / copper disc / black rod and cap / black base/cable/dimmer
 LF06LVO / white disc / satin rod and cap / white base / black cable/dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 500 mA	COB LED	1x17W	2500	2700	>80	D	plug driver**	push included (memory last step)


p. 129

**Lederam F1** / standing lamp

LF12 / black disc / satin rod and cap / black base/cable/dimmer
 LF13 / gold disc / black rod and cap / black base/cable/dimmer
 LF14 / copper disc / black rod and cap / black base/cable/dimmer
 LF15 / white disc / gold rod and cap / white base/cable/dimmer
 LF16 / white disc / satin rod and cap / white base/cable/dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
230V	mains voltage LED	LED board	1x15W	1550	2700	80	F	-	included (memory last step)
(110V)	(mains voltage LED)	(LED board)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(included (memory last step))


p. 130

**Lederam F2** / standing lamp

LF22 / black discs / satin rods and caps / black base/cable/dimmer
 LF23 / gold discs / black rods and caps / black base/cable/dimmer
 LF24 / copper discs / black rods and caps / black base/cable/dimmer
 LF25 / white discs / gold rods and caps / white base/cable/dimmer
 LF26 / white discs / satin rods and caps / white base/cable/dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
230V	mains voltage LED	LED board	2x15W 30W	3100	2700	80	F	-	included (memory last step)
(110V available with on/off)	(mains voltage LED)	(LED board)	(2x14W 28W)	(3080)	(2700)	(80)	(A+)	-	(included (memory last step))

p. 132

**Lederam F3** / standing lamp

LF32 / black discs / satin rod and cap / black base/cable/dimmer
 LF33 / gold discs / black rod and cap / black base/cable/dimmer
 LF34 / copper discs / black rod and cap / black base/cable/dimmer
 LF35 / white discs / gold rod and cap / white base/cable/dimmer
 LF36 / white discs / satin rod and cap / white base/cable/dimmer


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
230V	mains voltage LED	LED board	3x15W 45W	4650	2700	80	F	-	included (memory last step)
(110V available with on/off)	(mains voltage LED)	(LED board)	(3x14W 42W)	(4620)	(2700)	(80)	(A+)	-	(included (memory last step))

Sorry Giotto

[Finishes] // **Hand painting** is chosen for its deliberate textured effect and uniqueness of result. Any irregularities or unevenness in the coating cannot be considered defect, but rather a hallmark of the artisanal crafting process. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard. / (**) 230V version available with not interchangeable EU plug only - memory 100%.

p. 141



Sorry Giotto / pendant lamp with anvil and plug driver


SG9 / ring Ø 90 cm blue / black anvil / blue wires / black dimmer

SG12 / ring Ø 120 cm blue / black anvil / blue wires / black dimmer

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SG9 / ring Ø 90 cm blue / black anvil / blue wires / black dimmer	110-240V	constant current LED 350 mA	LED board	12x1W 12W	1788	2700	85	D	constant current plug driver*	push included (memory last step)
SG12 / ring Ø 120 cm blue / black anvil / blue wires / black dimmer				15x1W 15W	2235					

cable from lamp to dimmer 250 cm
cable from dimmer to plug driver 180 cm

p. 138




Sorry Giotto / table lamp

SG1 / blue ring / rough iron base / blue wire / black dimmer

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SG1 / blue ring / rough iron base / blue wire / black dimmer	110-240V**	constant current LED 350 mA	LED board	4x1W 4W	596	2700	85	D	constant current plug driver***	push included (memory last step)

p. 137

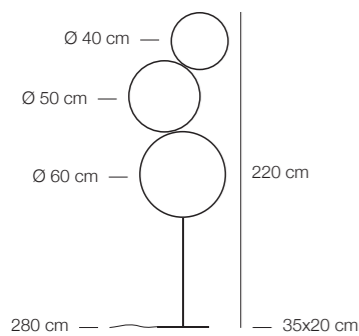

Sorry Giotto / standing lamp

SG3 / blue rings / black base and stem / blue wires / black dimmer

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SG3 / blue rings / black base and stem / blue wires / black dimmer	110-240V	constant current LED 350 mA	LED board	16x1W 16W	2384	2700	85	D	constant current plug driver*	push included (memory last step)




Light Stick

[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation. / (**) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 145



Light Stick / wall or ceiling lamp

LSP4B / black rod and base

LSP4 / nickel rod and base

LSP4G / satin gold rod and base

LSP6B / black rod and base

LSP6 / nickel rod and base

LSP6G / satin gold rod and base

LSP8B / black rod and base


LSP8 / nickel rod and base

LSP8G / satin gold rod and base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available with not dimmable driver)	constant current LED 350 mA	LED board	4x1W 4W	596	2700	85	D	constant current driver	Triac*
			6x1W 6W	894					
			8x1W 8W	1192					
230V (110V available on request)	constant current LED 350 mA	LED board	8x1W 8W	1192	2700	85	D	constant current driver	Triac*

base Ø 9x3,5 cm
H ledge 17 cm

p. 147



Light Stick / wall lamp

LSPV6B / black vertical rod and base


LSPV6 / nickel vertical rod and base

LSPV6G / satin gold vertical rod and base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available with not dimmable driver)	constant current LED 350 mA	LED board	6x1W 6W	894	2700	85	D	constant current driver	Triac*

H ledge 17 cm

p. 149

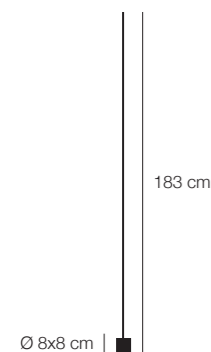

Light Stick / standing lamp

LSF10B / black rod / black base / black wires / black dimmer

LSF10 / nickel rod / black base / black wires / black dimmer

LSF10G / satin gold rod / black base / black wires / black dimmer


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 350 mA	LED board	10x1W 10W	1490	2700	85	D	constant current plug driver**	push included (memory last step)

Wa Wa

[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Copper** is a very malleable and ductile metal, chosen for its high thermal and electrical conductivity, as well as for its typical reddish-orange colour. We use it untreated, therefore it may oxidise with time, forming a green patina. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 155




Wa Wa / standing lamp

WWF / nickel structure, base and sticks / glass lens / black wires / black dimmer
 WWFBR / brass base and structure / copper sticks / glass lens / black wires / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 350 mA	LED board	5x1W 5W	745	2700	85	D	constant current plug driver*	push included (memory last step)

base cod. WWF: 20x20 cm
 base cod. WWFBR: 16x16 cm

p. 157



Uau / standing lamp

UAUF / nickel structure and base / glass lens / blue wire / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 350 mA	LED board	1x1W	149	2700	85	D	constant current plug driver*	push included (memory last step)




Giulietta

[Finishes] // **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).

p. 161




Giulietta BE / battery table lamp

GBB / black hoop and base / brass rod

GBBR / vintage brass hoop and base / brass rod

	battery	source	type	watt	lumen	K	CRI	en. class	battery charger	dimming
GBB / black hoop and base / brass rod	Li-ION 3,7V 4100 mA/h	constant voltage LED	LED board	1x2,6W	189	2700	>90	G	input 110/240V output 5V@1,2 A (EU or UK plug only)	included touch
GBBR / vintage brass hoop and base / brass rod										

p. 167

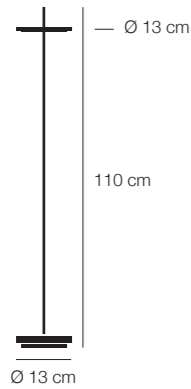

Giulietta BE / battery standing lamp

GBFB / black hoop and base / brass rod

GBFBR / vintage brass hoop and base / brass rod

	battery	source	type	watt	lumen	K	CRI	en. class	battery charger	dimming
GBFB / black hoop and base / brass rod	Li-ION 3,7V 4100 mA/h	constant voltage LED	LED board	1x2,6W	189	2700	>90	G	input 110/240V output 5V@1,2 A (EU or UK plug only)	included touch
GBFBR / vintage brass hoop and base / brass rod										




Jackie O

[Finishes] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Satin Steel** - the standard modular metal bases are composed of a satin steel plate mounted on a white lacquered metal frame and fixed to it by nickel square-head screws. On request we can supply the plate white matt lacquered as the frame or in different RAL colours.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 171



Jackie O / mod. JC/IC / recessed pendant lamp for plasterboard ceiling


JOJCLVO / mod. JC / nickel jack connection / blue wire / nickel curl

JOICLVO / mod. IC / nickel plate with tensioner / blue wire / nickel curl

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	constant voltage 24V LED	LED board	1x1,1W	63	2700	90	G	not included available on request	-

installation hole Jackie O JC Ø 1,25 cm
 installation hole Jackie O IC Ø 5,5 cm
 max plasterboard thickness 1,25 cm

p. 172



Jackie O Chandelier / pendant lamp

JO6QLVO / satin steel base 30x30 cm / blue wires / nickel curls


JO9QLVO / satin steel base 30x30 cm / blue wires / nickel curls

JO12QLVO / satin steel base 30x30 cm / blue wires / nickel curls

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (available 110V DALI dimmable)	constant voltage 24V LED	LED board	6x1,1W 6,6W	378	2700	90	G	constant voltage driver	Triac*
			9x1,1W 9,9W	567					
			12x1,1W 13,2W	756					

JO9QLVO

p. 172

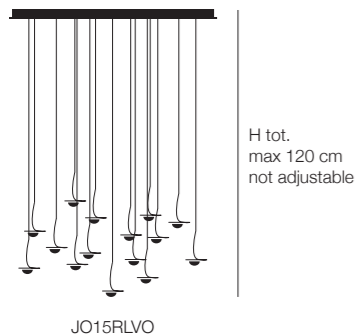

Jackie O Chandelier / pendant lamp

JO15QLVO / satin steel base 60x60 cm / blue wires / nickel curls

JO15RLVO / satin steel base 150x30 cm / blue wires / nickel curls

JO20QLVO / satin steel base 60x60 cm / blue wires / nickel curls

JO20RLVO / satin steel base 150x30 cm / blue wires / nickel curls

JO24QLVO / satin steel base 60x60 cm / blue wires / nickel curls

JO24RLVO / satin steel base 150x30 cm / blue wires / nickel curls

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	constant voltage 24V LED	LED board	15x1,1W 16,5W	945	2700	90	G	constant voltage driver	Triac*
			20x1,1W 22W	1260					
			24x1,1W 26,4W	1512					


JO15RLVO

PostKrisi

[Finishes] // **Hand painting** is chosen for its deliberate textured effect and uniqueness of result. Any irregularities or unevenness in the coating cannot be considered defect, but rather a hallmark of the artisanal crafting process. / **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Copper** is a very malleable and ductile metal, chosen for its high thermal and electrical conductivity, as well as for its typical reddish-orange colour. We use it untreated, therefore it may oxidise with time, forming a green patina. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Satin Steel** - the standard modular metal bases are composed of a satin steel plate mounted on a white lacquered metal frame and fixed to it by nickel square-head screws. On request we can supply the plate white matt lacquered as the frame or in different RAL colours.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / (**) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard. / (***) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 176




PostKrisi 50/51 / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK50LN / PostKrisi 50 / shade 85x35 cm natural / grey braided cable / nickel base	110V (bulb not supplied)-230V	mains voltage LED	E27 bulb	1x8W	900	2700	>80	E	-	IGBT/Triac*
PK51LN / PostKrisi 51 / shade 115x40 cm natural / grey braided cable / nickel base										
PK50LW / PostKrisi 50 / shade 85x35 cm white / grey braided cable / nickel base	110V (bulb not supplied)-230V	mains voltage LED	E27 bulb silver crowned	1x7,5W	810	2700	82	F	-	IGBT/Triac*
PK51LW / PostKrisi 51 / shade 115x40 cm white / grey braided cable / nickel base										
PK50LG / PostKrisi 50 / shade 85x35 cm gold / grey braided cable / nickel base										
PK51LG / PostKrisi 51 / shade 115x40 cm gold / grey braided cable / nickel base										
PK50LS / PostKrisi 50 / shade 85x35 cm silver / grey braided cable / nickel base										
PK51LS / PostKrisi 51 / shade 115x40 cm silver / grey braided cable / nickel base										

weight: PK50 1,5 kg / PK51 2,8 kg

p. 176




PostKrisi 52 / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK52LN / natural shade / grey braided cables / nickel base	110V (bulb not supplied)-230V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	IGBT/Triac*
PK52LW / white shade / grey braided cables / nickel base										
PK52LG / gold shade / grey braided cables / nickel base	110V (bulb not supplied)-230V	mains voltage LED	E27 bulb silver crowned	3x7,5W 22,5W	2430	2700	82	F	-	IGBT/Triac*
PK52LS / silver shade / grey braided cables / nickel base										

weight 3 kg


p. 179



Malagolina / table lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PKM10LN / natural shade / nickel base and structure / blue wire / black dimmer	110-240V	constant current LED 350 mA	LED board	2x1W 2W	298	2700	85	D	constant current plug driver**	push included (memory last step)
PKM10LW / white shade / nickel base and structure / blue wire / black dimmer										
PKM10LG / gold shade / nickel base and structure / blue wire / black dimmer										
PKM10LS / silver shade / nickel base and structure / blue wire / black dimmer										

p. 182

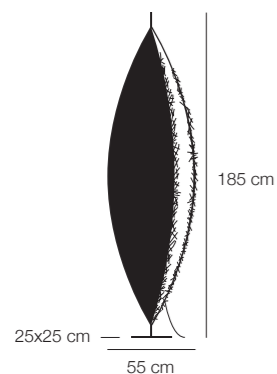


PostKrisi 100 / standing lamp

- PKF100W / white shade / nickel base and structure / black wires / black dimmer
- PKF100G / gold shade / nickel base and structure / black wires / black dimmer
- PKF100S / silver shade / nickel base and structure / black wires / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 350 mA	LED board	8x1W 8W	1192	2700	85	D	constant current plug driver**	push included (memory last step)

p. 184




PostKrisi 21 / 40 / wall lamp

- PKP21LN / PostKrisi W 21 / shade Ø 21 cm natural / nickel base
- PKP21LW / PostKrisi W 21 / shade Ø 21 cm white / nickel base
- PKP21LG / PostKrisi W 21 / shade Ø 21 cm gold / nickel base
- PKP21LS / PostKrisi W 21 / shade Ø 21 cm silver / nickel base
- PKP40LW / PostKrisi W 40 / shade Ø 40 cm white / nickel base
- PKP40LG / PostKrisi W 40 / shade Ø 40 cm gold / nickel base
- PKP40LS / PostKrisi W 40 / shade Ø 40 cm silver / nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 350 mA	LED board	2x1W 2W	298	2700	85	D	constant current driver	NO

Ø 21 cm: rod H 22 cm
Ø 40 cm: rod H 60 cm

p. 187




PostKrisi 70 / ceiling or wall lamp

- PKCW7LVOG / gold shade
- PKCW7LVOS / silver shade

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (available 110V DALI dimmable)	constant current LED 450 mA	COB LED	1x15W	2187	2700	>80	D	constant current driver	Triac

p. 188




PostKrisi 49 / pendant lamp

- PK494LWG / shade Ø 40 cm white/gold / white braided cable / white base
- PK494LWS / shade Ø 40 cm white/silver / white braided cable / white base
- PK496LWG / shade Ø 60 cm white/gold / white braided cable / white base
- PK496LWS / shade Ø 60 cm white/silver / white braided cable / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulb not supplied)-230V	mains voltage LED	E27 bulb silver crowned	1x7,5W	810	2700	82	F	-	IGBT/Triac*

weight: Ø 40 cm 1 kg / Ø 60 cm 1,5 kg

p. 188




PostKrisi 49 / pendant lamp

- PK498LWG / shade Ø 80 cm white/gold / white braided cable / white base
- PK498LWS / shade Ø 80 cm white/silver / white braided cable / white base
- PK4910LWG / shade Ø 100 cm white/gold / white braided cable / white base
- PK4910LWS / shade Ø 100 cm white/silver / white braided cable / white base

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK498LWG / shade Ø 80 cm white/gold / white braided cable / white base PK498LWS / shade Ø 80 cm white/silver / white braided cable / white base PK4910LWG / shade Ø 100 cm white/gold / white braided cable / white base PK4910LWS / shade Ø 100 cm white/silver / white braided cable / white base	110V (bulbs not supplied)-230V	mains voltage LED	E27 bulb silver crowned	3x7,5W 22,5W	2430	2700	82	F	-	IGBT/Triac*

weight: Ø 80 cm 2,8 kg / Ø 100 cm 3 kg

p. 191




PostKrisi 61 / table lamp

- PK61LN / natural shades / black base / brass rod / black cable and dimmer
- PK61LNNC / natural shades / nickel rod and base / black cable and dimmer
- PK61LW / white shades / black base / brass rod / black cable and dimmer
- PK61LWNC / white shades / nickel rod and base / black cable and dimmer

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK61LN / natural shades / black base / brass rod / black cable and dimmer PK61LNNC / natural shades / nickel rod and base / black cable and dimmer PK61LW / white shades / black base / brass rod / black cable and dimmer PK61LWNC / white shades / nickel rod and base / black cable and dimmer	110V (bulbs not supplied)-230V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	push included (memory last step)

p. 192

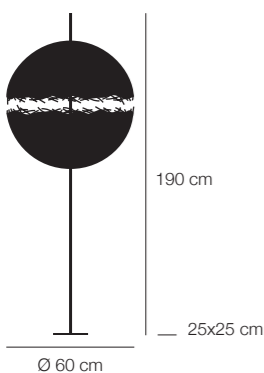


PostKrisi 64 / standing lamp

- PK64LN / natural shades / black base / brass rod / black cable and dimmer
- PK64LNNC / natural shades / nickel rod and base / black cable and dimmer
- PK64LW / white shades / black base / brass rod / black cable and dimmer
- PK64LWNC / white shades / nickel rod and base / black cable and dimmer

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK64LN / natural shades / black base / brass rod / black cable and dimmer PK64LNNC / natural shades / nickel rod and base / black cable and dimmer PK64LW / white shades / black base / brass rod / black cable and dimmer PK64LWNC / white shades / nickel rod and base / black cable and dimmer	110V (bulbs not supplied)-230V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	push included (memory last step)

p. 194




PostKrisi 65 / pendant lamp

- PK65LN / shades Ø 40 cm natural / brass structure / black cable and base
- PK65LNNC / shades Ø 40 cm natural / nickel structure and base / black cable
- PK65LW / shades Ø 40 cm white / brass structure / black cable and base
- PK65LWNC / shades Ø 40 cm white / nickel structure and base / black cable

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK65LN / shades Ø 40 cm natural / brass structure / black cable and base PK65LNNC / shades Ø 40 cm natural / nickel structure and base / black cable PK65LW / shades Ø 40 cm white / brass structure / black cable and base PK65LWNC / shades Ø 40 cm white / nickel structure and base / black cable	110V (bulbs not supplied)-230V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	IGBT/Triac*

H 200 cm / H rod 63 cm / weight 2,5 kg

p. 194




PostKrisi 66 / pendant lamp

- PK66LN / shades Ø 60 cm natural / brass structure / black cable and base
- PK66LNNC / shades Ø 60 cm natural / nickel structure and base / black cable
- PK66LW / shades Ø 60 cm white / brass structure / black cable and base
- PK66LWNC / shades Ø 60 cm white / nickel structure and base / black cable

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	110V (bulbs not supplied)-230V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	IGBT/Triac*

H 210 cm / H rod 83 cm / weight 3,5 kg

p. 194




PostKrisi 67 / pendant lamp

- PK67LN / shades Ø 80 cm natural / brass structure / black cable and base
- PK67LNNC / shades Ø 80 cm natural / nickel structure and base / black cable
- PK67LW / shades Ø 80 cm white / brass structure / black cable and base
- PK67LWNC / shades Ø 80 cm white / nickel structure and base / black cable

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	110V (bulbs not supplied)-230V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	IGBT/Triac*

H 220 cm / H rod 100 cm / weight 5 kg

p. 196

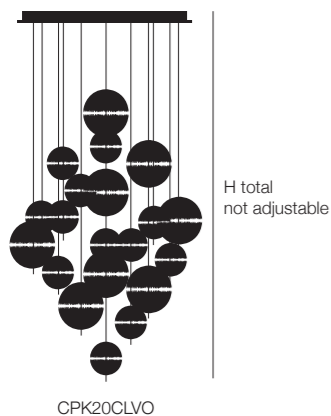

PostKrisi Chandelier / pendant lamp

- CPK3QLVO / satin steel base 30x30 cm / 3xPK14 / blue wires / H 180 cm
- CPK5QLVO / satin steel base 30x30 cm / 5xPK14 / blue wires / H 180 cm
- CPK7CLVO / satin steel base Ø 40 cm / 7xPK14 / blue wires / H 180 cm
- CPK7QLVO / satin steel base 60x60 cm / 7xPK14 / blue wires / H 180 cm
- CPK7RLVO / satin steel base 90x30 cm / 3xPK20 - 4xPK14 / blue wires / H 180 cm
- CPK10CLVO / satin steel base Ø 78 cm / 4xPK20 - 6xPK14 / blue wires / H 300 cm
- CPK20CLVO / satin steel base Ø 78 cm / 8xPK20 - 12xPK14 / blue wires / H 300 cm

PK14 = PostKrisi sphere Ø 14 cm natural with jack
 PK20 = PostKrisi sphere Ø 20 cm natural with jack

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	110V or 230V	constant voltage 24V LED	LED board	3x (2x1,1W) 6,6W	378	2700	90	G	constant voltage driver	Triac***
				5x (2x1,1W) 11W	630					
				7x (2x1,1W) 15,4W	882					
				10x (2x1,1W) 22W	1260					
				20x (2x1,1W) 44W	2520					


Fil de Fer

[Finishes] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering. / **Satin Steel** - the standard modular metal bases are composed of a satin steel plate mounted on a white lacquered metal frame and fixed to it by nickel square-head screws. On request we can supply the plate white matt lacquered as the frame or in different RAL colours

[Cables] // (**s**) suspension cable. / (**el**) electrical cable.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 201




Fil de Fer / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
F5SL / Ø 50 cm aluminium / steel cable ^(s) / grey braided cable ^(el) / nickel base	230V (110V available with not dimmable driver)	low voltage LED 12Vdc	G4 bulb	12x0,8W 9,6W	840	2700	82	G	constant voltage driver	Triac
F5SLG / Ø 50 cm matt gold anodized / steel cable ^(s) / gold braided cable ^(el) / gold-plated base				18x0,8W 14,4W	1260					
F7SL / Ø 70 cm aluminium / steel cable ^(s) / grey braided cable ^(el) / nickel base				24x0,8W 19,2W	1680					
F7SLG / Ø 70 cm matt gold anodized / steel cable ^(s) / gold braided cable ^(el) / gold-plated base										
F10SL / Ø 100 cm aluminium / steel cable ^(s) / grey braided cable ^(el) / nickel base										
F10SLG / Ø 100 cm matt gold anodized / steel cable ^(s) / gold braided cable ^(el) / gold-plated base										

weight: Ø 50 8 kg / Ø 70 10 kg / Ø 100 16 kg

p. 205




Nuvola / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
FNVAL / mod. A / 120x50x35 cm aluminium / steel cables ^(s) / grey braided cable ^(el) / nickel base	230V (110V available with not dimmable driver)	low voltage LED 12Vdc	G4 bulb	24x0,8W 19,2W	1680	2700	82	G	constant voltage driver	Triac
ANODGA* / anodized gold finish for Nuvola mod. A (net price to be added to code FNVAL)				36x0,8W 28,8W	2520					
FNVEL / mod. E / 200x80x50 cm aluminium / steel cables ^(s) / grey braided cable ^(el) / nickel base				44x0,8W 35,2W	3080					
ANODGE* / anodized gold finish for Nuvola mod. E (net price to be added to code FNVEL)										
FNVFL / mod. F / 240x140x50 cm aluminium / steel cables ^(s) / grey braided cable ^(el) / nickel base										
ANODGF* / anodized gold finish for Nuvola mod. F (net price to be added to code FNVFL)										

mod. A / weight 7 kg
mod. E / weight 12 kg
mod. F / weight 20 kg
cables 170 cm to be cut to size

* anodized gold version supplied with gold braided cable^(el) / gold-plated base
Further dimensions available on request.


p. 207



Fil de Fer / floor lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
F3L / Ø 30 cm aluminium / grey braided cable / black dimmer	110-240V	low voltage LED 12Vdc	G4 bulb	8x0,8W 6,4W	560	2700	82	G	constant voltage plug driver*	push included (memory last step)
F3LG / Ø 30 cm gold / gold braided cable / black dimmer				10x0,8W 8W	700					
F5L / Ø 50 cm aluminium / grey braided cable / black dimmer				15x0,8W 12W	1050					
F5LG / Ø 50 cm gold / gold braided cable / black dimmer				20x0,8W 16W	1400					
F7L / Ø 70 cm aluminium / grey braided cable / black dimmer										
F7LG / Ø 70 cm gold / gold braided cable / black dimmer										
F10L / Ø 100 cm aluminium / grey braided cable / black dimmer										
F10LG / Ø 100 cm gold / gold braided cable / black dimmer										


12V cable: 170 cm / plug cable: 180 cm



Sweet Light Chandelier / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
CSL3QL / 3x Sweet Light Ø 10 cm / satin base 30x30 cm / H 180 cm	110V or 230V	low voltage LED 12Vdc	G4 bulb	3x0,8W 2,4W	210	2700	82	G	low voltage driver	NO
CSL5QL / 5x Sweet Light Ø 10 cm / satin base 30x30 cm / H 180 cm	230V (110V available with not dimmable driver)	low voltage LED 12Vdc	G4 bulb	5x0,8W 4W	350	2700	82	G	constant voltage driver	Triac
CSL7CL / 7x Sweet Light Ø 10 cm / satin base Ø 40 cm / H 180 cm				7x0,8W 5,6W	490					
CSL7QL / 7x Sweet Light Ø 10 cm / satin base 60x60 cm / H 180 cm				10x0,8W 8W	700					
CSL10CL / 10x Sweet Light Ø 10 cm / satin base Ø 78 cm / H 180 cm				15x0,8W 12W	1050					
CSL15QL / 15x Sweet Light Ø 10 cm / satin base 60x60 cm / H 300 cm				20x0,8W 16W	1400					
CSL20CL / 20x Sweet Light Ø 10 cm / satin base Ø 78 cm / H 300 cm				35x0,8W 28W	2450					
CSL35CL / 35x Sweet Light Ø 10 cm / satin base Ø 78 cm / H 400 cm										


Standard version with aluminium Sweet Light spheres.



Sweet Light / table lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SLL / Ø 10 cm aluminium / blue wire	110-240V	low voltage LED 12Vdc	G4 bulb	1x0,8W	70	2700	82	G	constant voltage plug driver*	included touch (on the sphere)
SLLBR / Ø 10 cm brass / blue wire										
SLLS / Ø 10 cm silver / blue wire										

cable: 250 cm



Uomo della Luce S / table lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
USL / rough iron structure / sphere Ø 10 cm aluminium / black dimmer / black wires	110-240V	low voltage LED 12Vdc	G4 bulb	1x0,8W	70	2700	82	G	constant voltage plug driver *	push included (memory last step)




Lucenera

[Finishes] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Carbon tubes**. The production of the tubes is partially craftmade. Any imperfection in the texture is a peculiarity of the product and sign of craftsmanship. The quality of the tubes is guaranteed by using LED bulbs only, preferably with the max wattage included in our standard products.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer.


p. 215



Lucenera 504 / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
L504L / black tube and base / metal braided cable / nickel details	110V (bulb not supplied)-230V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	>90	G	-	IGBT/Triac*
L504LW / white tube and base / metal braided cable / nickel details										


p. 216



Lucenera 206 / ceiling lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
L20680L / black tubes/base/flexible pipes / nickel details	110V (bulbs not supplied)-230V	mains voltage LED	GU10 bulb	2x5,5W 11W	750	3000	>90	G	-	IGBT/Triac*
L20680LW / white tubes/base/flexible pipes / nickel details										


p. 217, 221



Lucenera 502 / 503 / wall lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
L502L / Lucenera 502 / black tube/base/rod / nickel details	110V (bulb not supplied)-230V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	>90	G	-	NO on/off switch included
L502LW / Lucenera 502 / white tube/base/rod / nickel details										
L503L / Lucenera 503 / black tubes/base/rods / nickel details	110V (bulbs not supplied)-230V	mains voltage LED	GU10 bulb	2x5,5W 11W	750	3000	>90	G	-	NO on/off switch included
L503LW / Lucenera 503 / white tubes/base/rods / nickel details										

p. 222




Lucenera 506 / standing lamp

L506L / black tube/base/stand / nickel details

L506LW / white tube/base/stand / nickel details

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110V (bulb not supplied)-230V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	>90	G	-	included (memory last step)

p. 223



Lucenera 500 / table lamp

L500L / black tube/base/stand / nickel details

L500LW / white tube/base/stand / nickel details

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
230V (110V available with on/off - bulb not supplied)	mains voltage LED	GU10 bulb	1x5,5W	375	3000	>90	G	-	included (memory 0%)


Stchu-Moon

[*Finishes*] // **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering. / **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request.

[*Cables*] // (**s**) suspension cable. / (**el**) electrical cable.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*****) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / (******) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard. / (*******) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 227



Bellatrix / wall lamp

BTXA12G / Ø 120 cm gold (blue exterior / white base) - irregular finish mod. A / brass flex


BTXB12G / Ø 120 cm gold (blue exterior / white base) - irregular finish mod. B / brass flex

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available DALI dimmable)	constant current LED 350 mA	LED board	9x1W 9W	1341	2700	85	D	constant current driver	Triac***

base Ø 16x6 cm



p. 229


**Stchu-Moon 02 / pendant lamp**

- SM24LS / Ø 40 cm silver (exterior black) / steel spoons / black cable and base
- SM24LG / Ø 40 cm gold (exterior black) / steel spoons / black cable and base
- SM24LC / Ø 40 cm copper (exterior black) / steel spoons / black cable and base
- SM26LS / Ø 60 cm silver (exterior black) / steel spoons / black cable and base
- SM26LG / Ø 60 cm gold (exterior black) / steel spoons / black cable and base
- SM26LC / Ø 60 cm copper (exterior black) / steel spoons / black cable and base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available on request)	constant voltage 24V	LED board	2x3,2W 6,4W	860	2700	80	E	constant voltage driver	Triac***

weight: Ø 40 cm 2 kg / Ø 60 cm 3,5 kg

p. 229


**Stchu-Moon 02 / pendant lamp**

- SM28LS / Ø 80 cm silver (exterior black) / steel spoons / steel cable⁽⁶⁾ / black cable⁽⁶⁾ and base
- SM28LG / Ø 80 cm gold (exterior black) / steel spoons / steel cable⁽⁶⁾ / black cable⁽⁶⁾ and base
- SM28LC / Ø 80 cm copper (exterior black) / steel spoons / steel cable⁽⁶⁾ / black cable⁽⁶⁾ and base
- SM210LS / Ø 100 cm silver (exterior black) / steel spoons / steel cable⁽⁶⁾ / black cable⁽⁶⁾ and base
- SM210LG / Ø 100 cm gold (exterior black) / steel spoons / steel cable⁽⁶⁾ / black cable⁽⁶⁾ and base
- SM210LC / Ø 100 cm copper (exterior black) / steel spoons / steel cable⁽⁶⁾ / black cable⁽⁶⁾ and base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available on request)	constant voltage 24V	LED board	4x3,2W 12,8W	1720	2700	80	E	constant voltage driver	Triac***

weight: Ø 80 cm 6,5 kg / Ø 100 cm 7,5 kg

p. 233


**Stchu-Moon 02 / pendant lamp with bulbs**

- SM24230LS / Ø 40 cm silver (exterior black) / black cable / nickel base
- SM24230LG / Ø 40 cm gold (exterior black) / black cable / nickel base
- SM24230LC / Ø 40 cm copper (exterior black) / black cable / nickel base
- SM26230LS / Ø 60 cm silver (exterior black) / black cable / nickel base
- SM26230LG / Ø 60 cm gold (exterior black) / black cable / nickel base
- SM26230LC / Ø 60 cm copper (exterior black) / black cable / nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulb not supplied)-230V	mains voltage LED	E27 bulb silver crowned	1x7,5W	810	2700	82	F	-	IGBT/Triac*

weight: Ø 40 cm 1,8 kg / Ø 60 cm 2,8 kg

p. 233


**Stchu-Moon 02 / pendant lamp with bulbs**

- SM28230LS / Ø 80 cm silver (exterior black) / black cables / nickel base
- SM28230LG / Ø 80 cm gold (exterior black) / black cables / nickel base
- SM28230LC / Ø 80 cm copper (exterior black) / black cables / nickel base
- SM210230LS / Ø 100 cm silver (exterior black) / black cables / nickel base
- SM210230LG / Ø 100 cm gold (exterior black) / black cables / nickel base
- SM210230LC / Ø 100 cm copper (exterior black) / black cables / nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-230V	mains voltage LED	E27 bulb silver crowned	3x7,5W 22,5W	2430	2700	82	F	-	IGBT/Triac*

weight: Ø 80 cm 6,5 kg / Ø 100 cm 7,5 kg

p. 234




3x Ø 40 cm
H max 190 cm / tot. Ø 105 cm / weight 13,5 cm
3x Ø 60 cm
H max 200 cm / tot. Ø 145 cm / weight 18,5 cm

Stchu-Moon Chandelier / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SM234LS / Ø 40 cm silver (exterior black) / steel spoons / black cables and structure	230V (110V available 1...10V or push dimm.)	constant voltage 24V	LED board	6x3,2W 19,2W	2580	2700	80	E	constant voltage driver	Triac***
SM234LG / Ø 40 cm gold (exterior black) / steel spoons / black cables and structure										
SM234LC / Ø 40 cm copper (exterior black) / steel spoons / black cables and structure										
SM236LS / Ø 60 cm silver (exterior black) / steel spoons / black cables and structure										
SM236LG / Ø 60 cm gold (exterior black) / steel spoons / black cables and structure										
SM236LC / Ø 60 cm copper (exterior black) / steel spoons / black cables and structure										


p. 239



Stchu-Moon 05 / wall lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SM5LS / silver (exterior white) / steel spoon / white base	230V (110V available 1...10V or push dimm.)	constant voltage 24V	LED board	1x3,2W	430	2700	80	E	constant voltage driver	Triac***
SM5LG / gold (exterior white) / steel spoon / white base										
SM5LC / copper (exterior white) / steel spoon / white base										


p. 242



Stchu-Moon 01 / floor lamp


	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SM14LS / Ø 40 cm silver (ext. black) / steel spoon / metal braided cable / black dimmer/cable	110-240V	constant voltage 24V	LED board	1x3,2W	430	2700	80	E	constant voltage plug driver**	push included (memory last step)
SM14LG / Ø 40 cm gold (ext. black) / steel spoon / metal braided cable / black dimmer/cable										
SM14LC / Ø 40 cm copper (ext. black) / steel spoon / metal braided cable / black dimmer/cable										
SM16LS / Ø 60 cm silver (ext. black) / steel spoons / metal braided cable / black dimmer/cable				2x3,2W 6,4W	860					
SM16LG / Ø 60 cm gold (ext. black) / steel spoons / metal braided cable / black dimmer/cable										
SM16LC / Ø 60 cm copper (ext. black) / steel spoons / metal braided cable / black dimmer/cable										

p. 243

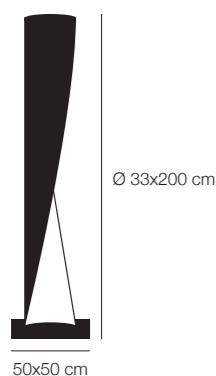

Stchu-Moon 09 / standing lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
SM9LS / silver (rough iron ext.) / steel spoons / metal braided cable / black dimmer/cable	110-240V	constant voltage 24V (1x candle included)	LED board	2x3,2W 6,4W	860	2700	80	E	constant voltage plug driver**	push included (memory last step)
SM9LG / gold (rough iron ext.) / steel spoons / metal braided cable / black dimmer/cable										
SM9LC / copper (rough iron ext.) / steel spoons / metal braided cable / black dimmer/cable										

**Stchu-Moon 08** / wall/standing lamp

SM88LS / Ø 80 cm silver (exterior grey matt) / nickel light structure / black anvil

SM88LG / Ø 80 cm gold (exterior grey matt) / nickel light structure / black anvil

SM88LC / Ø 80 cm copper (exterior grey matt) / nickel light structure / black anvil


SM812LS / Ø 120 cm silver (exterior grey matt) / nickel light structure / black anvil

SM812LG / Ø 120 cm gold (exterior grey matt) / nickel light structure / black anvil

SM812LC / Ø 120 cm copper (exterior grey matt) / nickel light structure / black anvil

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	low voltage LED 12V	GU5.3 bulb	1x7,5W	630	3000	90	F	constant voltage plug driver**	push included (memory last step)

H recommended distance
from lamp to disc 25 cm ca

**Stchu-Moon SR** / semi-recessed lamp for plasterboard ceiling

SMSI6BG / Ø 60 cm gold (ext. black) / steel spoon

SMSI8BG / Ø 80 cm gold (ext. black) / steel spoon


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	constant voltage 24V	LED board	3x3,2W 9,6W	1290	2700	80	E	constant voltage driver not included – available on request	-

Silver and copper finish available on request.

Ø 60 cm: hole Ø 52 cm / max depth 15 cm
Ø 80 cm: hole Ø 69 cm / max depth 20 cm

Punti Luminosi

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / (**) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

**Stchu-Moon R** / recessed lamp for plasterboard ceiling

SMI14S / Ø 14 cm silver (bulb not included)

SMI14G / Ø 14 cm gold (bulb not included)

SMI14C / Ø 14 cm copper (bulb not included)

LS4 / LED bulb

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	mains voltage	GU10 bulb not included	-	-	-	-	-	-	-
230V	mains voltage LED	GU10 bulb	5,5W	375	3000	>90	G	-	IGBT/Triac*

installation hole Ø 13 cm / depth 15 cm
plasterboard thickness max 1,25 cm



p. 249



Pepita 102 / recessed lamp for plasterboard ceiling/wall

P102 / white / gold

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	constant voltage 24V LED	LED board	1x1,7W	172	2700	>90	F	not included available on request	-

internal Ø 9,7 cm / external Ø 11 cm
depth 5,5 cm / installation hole Ø 10,2 cm
max plasterboard thickness 1,25 cm

p. 250



Pepita 65 / recessed lamp for plasterboard ceiling

P65 / white / gold / transparent cover

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	constant voltage 24V LED	LED board	1x1,7W	172	2700	>90	F	not included available on request	-

internal Ø 5,9 cm / external Ø 8,9 cm
depth 5,6 cm / installation hole Ø 6,5 cm
max plasterboard thickness 1,25 cm

p. 253

Ø 9x3,5 cm



12 cm ca

EC 301 / wall or ceiling lamp

EC301JB / black structure and base / brass joint and lens holder / glass lens


EC301JW / white structure and base / brass joint and lens holder / glass lens

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available not dimmable)	constant current LED 500 mA	COB LED	1x5W 5W	569	2700	>80	F	constant current driver	IGBT/Triac**

Macchina della Luce

[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.


[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.



Macchina della Luce mod. A / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MALG / discs Ø 80-50-30-18 cm / gold / nickel base / brass rods	230V	constant voltage 24V	LED board	7x5,8W 40,6W	5040	2700	80	E	constant voltage driver	Triac*
MALS / discs Ø 80-50-30-18 cm / silver / nickel base / aluminium rods										
MALC / discs Ø 80-50-30-18 cm / copper / nickel base / brass rods										
MALG110V / discs Ø 80-50-30-18 cm / gold / nickel base / brass rods	110V	constant voltage 24V	LED board	7x5,8W 40,6W	5040	2700	80	E	constant voltage driver	Triac*
MALS110V / discs Ø 80-50-30-18 cm / silver / nickel base / aluminium rods										
MALC110V / discs Ø 80-50-30-18 cm / copper / nickel base / brass rods										


weight 10 kg / rods 300 cm available on request



Macchina della Luce mod. B / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MBLG / discs Ø 80-18 cm / gold / nickel base / brass rods	230V	constant voltage 24V	LED board	2x5,8W 11,6W	1440	2700	80	E	constant voltage driver	Triac*
MBLS / discs Ø 80-18 cm / silver / nickel base / aluminium rods										
MBLC / discs Ø 80-18 cm / copper / nickel base / brass rods										
MBLG110V / discs Ø 80-18 cm / gold / nickel base / brass rods	110V	constant voltage 24V	LED board	2x5,8W 11,6W	1440	2700	80	E	constant voltage driver	Triac*
MBLS110V / discs Ø 80-18 cm / silver / nickel base / aluminium rods										
MBLC110V / discs Ø 80-18 cm / copper / nickel base / brass rods										


weight 6 kg / rods 300 cm available on request

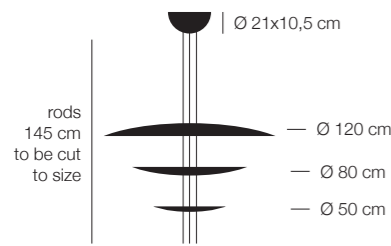

Macchina della Luce mod. C / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MCLG / discs Ø 120 (flying leaf)-80-50 cm / gold / nickel base / brass rods	230V	constant voltage 24V	LED board	7x5,8W 40,6W	5040	2700	80	E	constant voltage driver	Triac*
MCLS / discs Ø 120 (flying leaf)-80-50 cm / silver / nickel base / aluminium rods										
MCLC / discs Ø 120 (flying leaf)-80-50 cm / copper / nickel base / brass rods										
MCLG110V / discs Ø 120 (flying leaf)-80-50 cm / gold / nickel base / brass rods	110V	constant voltage 24V	LED board	7x5,8W 40,6W	5040	2700	80	E	constant voltage driver	Triac*
MCLS110V / discs Ø 120 (flying leaf)-80-50 cm / silver / nickel base / aluminium rods										
MCLC110V / discs Ø 120 (flying leaf)-80-50 cm / copper / nickel base / brass rods										

weight 13 kg / rods 300 cm available on request

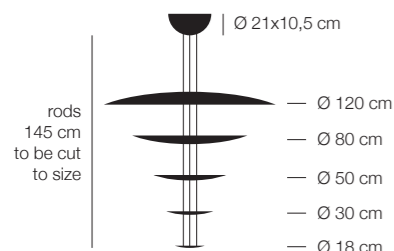**Macchina della Luce mod. D / pendant lamp**

MDLG / discs Ø 120 (flying leaf)-80-50-30-18 cm / gold / nickel base / brass rods

MDLS / discs Ø 120 (flying leaf)-80-50-30-18 cm / silver / nickel base / aluminium rods

MDLC / discs Ø 120 (flying leaf)-80-50-30-18 cm / copper / nickel base / brass rods


MDLG110V / discs Ø 120 (flying leaf)-80-50-30-18 cm / gold / nickel base / brass rods

MDLS110V / discs Ø 120 (flying leaf)-80-50-30-18 cm / silver / nickel base / aluminium rods

MDLC110V / discs Ø 120 (flying leaf)-80-50-30-18 cm / copper / nickel base / brass rods

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	constant voltage 24V	LED board	10x8,8W 58W	7200	2700	80	E	constant voltage driver	Triac*
110V	constant voltage 24V	LED board	8x5,8W 46,4W	5760	2700	80	E	constant voltage driver	Triac*

weight 16 kg / rods 300 cm available on request

**Macchina della Luce mod. E / pendant lamp**

MELG / discs Ø 50-30-18 cm / gold / nickel base / brass rods

MELS / discs Ø 50-30-18 cm / silver / nickel base / aluminium rods

MELC / discs Ø 50-30-18 cm / copper / nickel base / brass rods


MELG110V / discs Ø 50-30-18 cm / gold / nickel base / brass rods

MELS110V / discs Ø 50-30-18 cm / silver / nickel base / aluminium rods

MELC110V / discs Ø 50-30-18 cm / copper / nickel base / brass rods

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	constant voltage 24V	LED board	4x5,8W 23,2W	2880	2700	80	E	constant voltage driver	Triac*
110V	constant voltage 24V	LED board	4x5,8W 23,2W	2880	2700	80	E	constant voltage driver	Triac*

weight 6 kg / rods 300 cm available on request

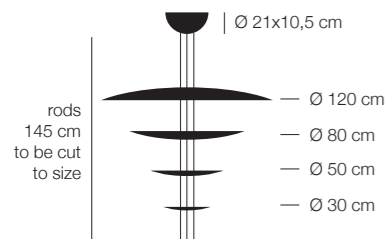**Macchina della Luce mod. F / pendant lamp**

MFLG / discs Ø 120 (flying leaf)-80-50-30 cm / gold / nickel base / brass rods

MFLS / discs Ø 120 (flying leaf)-80-50-30 cm / silver / nickel base / aluminium rods

MFLC / discs Ø 120 (flying leaf)-80-50-30 cm / copper / nickel base / brass rods


MFLG110V / discs Ø 120 (flying leaf)-80-50-30 cm / gold / nickel base / brass rods

MFLS110V / discs Ø 120 (flying leaf)-80-50-30 cm / silver / nickel base / aluminium rods

MFLC110V / discs Ø 120 (flying leaf)-80-50-30 cm / copper / nickel base / brass rods

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	constant voltage 24V	LED board	9x5,8W 52,2W	6480	2700	80	E	constant voltage driver	Triac*
110V	constant voltage 24V	LED board	8x5,8W 46,4W	5760	2700	80	E	constant voltage driver	Triac*

weight 15 kg / rods 300 cm available on request

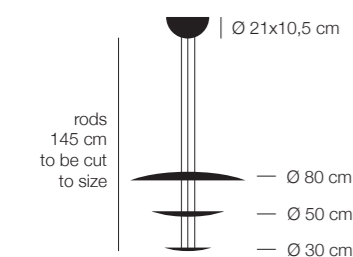**Macchina della Luce mod. I / pendant lamp**

MILG / discs Ø 80-50-30 cm / gold / nickel base / brass rods

MILS / discs Ø 80-50-30 cm / silver / nickel base / aluminium rods

MILC / discs Ø 80-50-30 cm / copper / nickel base / brass rods

MILG110V / discs Ø 80-50-30 cm / gold / nickel base / brass rods

MILS110V / discs Ø 80-50-30 cm / silver / nickel base / aluminium rods

MILC110V / discs Ø 80-50-30 cm / copper / nickel base / brass rods

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	constant voltage 24V	LED board	5x5,8W 29W	3600	2700	80	E	constant voltage driver	Triac*
110V	constant voltage 24V	LED board	5x5,8W 29W	3600	2700	80	E	constant voltage driver	Triac*


weight 8 kg / rods 300 cm available on request

Luci d'Oro

[Finishes] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / (**) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation. / (***) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 264

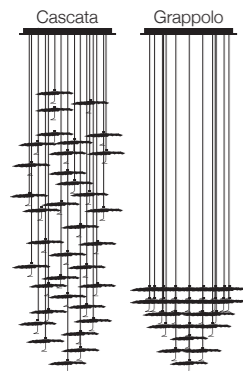

base Ø 78 cm / shades Ø 20 cm ca. / H max 300 cm not adjustable

Gold Moon Chandelier / pendant lamp

Cascata

CGM20CLVO / satin steel base / 20x black/gold wrap shades / copper curls / nickel jack / black wires

CGM25CLVO / satin steel base / 25x black/gold wrap shades / copper curls / nickel jack / black wires

CGM35CLVO / satin steel base / 35x black/gold wrap shades / copper curls / nickel jack / black wires

Grappolo

CGM20CLVOG / satin steel base / 20x black/gold wrap shades / copper curls / nickel jack / black wires


CGM25CLVOG / satin steel base / 25x black/gold wrap shades / copper curls / nickel jack / black wires

CGM35CLVOG / satin steel base / 35x black/gold wrap shades / copper curls / nickel jack / black wires

Further base dimensions and finish (ie. black/silver shades) available.

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
Cascata	110V or 230V	constant voltage 24V LED	LED board	20x1,1W 22W	1260	2700	90	G	constant voltage driver	IGBT/Triac**
				25x1,1W 27,5W	1575					
				35x1,1W 37,5W	2205					
Grappolo	110V or 230V	constant voltage 24V LED	LED board	20x1,1W 22W	1260	2700	90	G	constant voltage driver	IGBT/Triac**
				25x1,1W 27,5W	1575					
				35x1,1W 38,5W	2205					

p. 271



installation hole mod. JC Ø 1,25 cm
installation hole mod. IC Ø 5,5 cm
max plasterboard thickness 1,25 cm

Gold Moon / mod. JC/IC / recessed pendant lamp for plasterboard ceiling

GMJCLVO / mod. JC / nickel jack connection / black wire / black/gold wrap shade / copper curl

GMICLVO / mod. IC / nickel plate with tensioner / black wire / black/gold wrap shade / copper curl

GM= black/gold shades Ø 20 cm / SPL= black/brass Spot Light


Further base dimensions and finish (ie. black/silver shades) available.

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
GMJCLVO / mod. JC / nickel jack connection / black wire / black/gold wrap shade / copper curl	-	constant voltage 24V LED	LED board	1x1,1W	63	2700	90	G	not included available on request	-
GMICLVO / mod. IC / nickel plate with tensioner / black wire / black/gold wrap shade / copper curl	-	constant voltage 24V LED	LED board	1x1,1W	63	2700	90	G	not included available on request	-



p. 277

min 76 / max. 83 cm ca.

min 68 /
max. 75
cm ca.**Gold Moon** / wall or ceiling lamp


GMWG / black/gold wrap shades 3xØ 30 cm/3x Ø 25 cm / copper curls / black bases

Customizable arrangements with multiple lamps available on request.

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (available 110V DALI dimmable)	constant voltage 24V LED	LED board	6x1,1W 6,6W	378	2700	90	G	constant voltage driver	Triac**

H ledge 10 cm ca.

p. 279

**Malagola** / mod. 27 / pendant lamp

ML27LG / gold / black base and cable


ML27LS / silver / black base and cable

ML27LC / copper / black base and cable

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 250 mA	COB LED	1x2,3W	350	2700	>80	F	constant current driver	NO

weight 0,9 kg

p. 279

**Malagola** / mod. 55 / pendant lamp

ML55LG / gold / black braided cable / black base


ML55LS / silver / black braided cable / black base

ML55LC / copper / black braided cable / black base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulb not supplied)-230V	mains voltage LED	E27 bulb silver crowned	1x7,5W	810	2700	82	F	-	IGBT/Triac*

weight 1,7 kg

p. 279

**Malagola** / mod. 110 / pendant lamp

ML110LG / gold / black braided cable / black base


ML110LS / silver / black braided cable / black base

ML110LC / copper / black braided cable / black base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-230V	mains voltage LED	E27 bulb silver crowned	3x7,5W 22,5W	2430	2700	82	F	-	IGBT/Triac*

weight 4,5 kg

p. 280

**Disco** / ceiling lamp

DSCLG / gold / polished aluminium and nickel details
 DSCLS / silver / polished aluminium and nickel details
 DSCLC / copper / polished aluminium and nickel details
 DSCLW / white / polished aluminium and nickel details

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (available 110V DALI dimmable)	constant current LED 450 mA	COB LED	1x15W	2187	2700	85	D	constant current driver	Triac**


p. 281

**Luna** / wall lamp

LNW30G / gold / copper stick / brass flex / black base
 LNW30S / silver / copper stick / brass flex / black base
 LNW30C / copper / copper stick / brass flex / black base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 230V	constant current LED 350 mA	interch. LED	2x1W 2W	298	2700	85	D	constant current driver	NO

p. 281


**Luna Piena** / ceiling or wall lamp

LP80LG / Luna Piena 80 / gold flying leaf (exterior grey matt) / brass flex / white base
 LP80LS / Luna Piena 80 / silver flying leaf (exterior grey matt) / nickel flex / white base
 LP80LC / Luna Piena 80 / copper flying leaf (exterior grey matt) / brass flex / white base
 LP120LG / Luna Piena 120 / gold flying leaf (exterior grey matt) / brass flex / white base
 LP120LS / Luna Piena 120 / silver flying leaf (exterior grey matt) / nickel flex / white base
 LP120LC / Luna Piena 120 / copper flying leaf (exterior grey matt) / brass flex / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available on request)	low voltage LED 12V	GU5.3	1x7,5W	630	3000	90	F	constant voltage driver	IGBT/Triac

H recommended distance
 from lamp to disc 25 cm ca
 Ø 80: flex Ø 1,3x50 cm
 Ø 120: flex Ø 1,5x80 cm


p. 285

**Francesca** / wall lamp

FR8230LWG / Francesca 80 / white/gold back side / white base
 FR8230LG / Francesca 80 / gold / gold base
 FR8230LS / Francesca 80 / silver / silver base
 FR8230LC / Francesca 80 / copper / copper base
 FR12230LWG / Francesca 120 / white/gold back side / white base
 FR12230LG / Francesca 120 / gold / gold base
 FR12230LS / Francesca 120 / silver / silver base
 FR12230LC / Francesca 120 / copper / copper base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-230V	mains voltage LED	E27 LED bulb	8x8W 64W	7200	2700	>80	E	-	IGBT/Triac*

p. 286




Luce d'Oro / table lamp

- LOLG / gold / brass flex / rough iron base / black switch and cable
- LOLS / silver / nickel flex / rough iron base / black switch and cable
- LOLC / copper / brass flex / rough iron base / black switch and cable

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	low voltage LED 12V	GU4 bulb	1x3,5W	200	2700	80	G	constant voltage plug driver	NO on/off switch included

p. 287




Luce d'Oro / standing lamp

- LOFLG / gold / brass flex / rough iron base and structure / black cable and dimmer
- LOFLS / silver / nickel flex / rough iron base and structure / black cable and dimmer
- LOFLC / copper / brass flex / rough iron base and structure / black cable and dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	low voltage LED 12V	GU5.3 bulb	1x7,5W	630	3000	90	F	constant voltage plug driver***	push included (memory last step)

p. 288




Luna / table candle holder

- LNG / gold / rough iron base
- LNS / silver / rough iron base
- LNC / copper / rough iron base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	candle (included)	-	-	-	-	-	-	-	-

p. 289



Gemma / table candle holder

- GMG / gold / rough iron structure
- GMS / disc silver / rough iron structure
- GMC / copper / rough iron structure

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
-	candle (included)	-	-	-	-	-	-	-	-



Ø 33x200 cm

Colonna / standing lamp

CNLG / gold interior (flying leaf) / rough iron coloumn / black dimmer

CNLS / silver interior (flying leaf) / rough iron coloumn / black dimmer

CNLC / copper interior (flying leaf) / rough iron coloumn / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x18W	1800	2700	>80	F	-	included (memory last step)

Turciù

[*Finishes*] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*****) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer.



Ø 11x11 cm

90/160 cm
variable

Turciù / 36 flex / ceiling/pendant lamp

TRS36LNC / nickel flex (nickel lampholder) / satin nickel base

TRS36LBR / brass flex (nickel lampholder) / satin nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-230V	mains voltage LED	E14 bulb	36x3,4W 122,4W	13680	2700	>80	E	-	IGBT/Triac*

flex Ø 0,85 cm:

7x75 cm / 10x100 cm / 9x125 cm / 10x150 cm

weight 20 kg



Ø 9x11 cm

90/160 cm
variable

Turciù / 21 flex / ceiling/pendant lamp

TRS21LNC / nickel flex (nickel lampholder) / satin nickel base

TRS21LBR / brass flex (nickel lampholder) / satin nickel base


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-230V	mains voltage LED	E14 bulb	21x3,4W 71,4W	7980	2700	>80	E	-	IGBT/Triac*

flex Ø 0,85 cm: 5x100 cm / 16x150 cm

weight 11 kg



p. 295



90/160 cm variable

flex Ø 0,85 cm: 16x150 cm
weight 9 kg

Turciù / 16 flex / ceiling/pendant lamp

TRS16LNC / nickel flex (nickel lampholder) / satin nickel base
TRS16LBR / brass flex (nickel lampholder) / satin nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-230V	mains voltage LED	E14 bulb	16x3,4W 54,4W	6080	2700	>80	E	-	IGBT/Triac*

p. 296



90/160 cm variable


flex Ø 0,85 cm: 9x150 cm
weight 5 kg

Turciù / 9 flex / ceiling/pendant lamp

TR9LNC / nickel flex (nickel lampholder) / satin nickel base
TR9LBR / brass flex (nickel lampholder) / satin nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-230V	mains voltage LED	E14 bulb	9x3,4W 30,6W	3420	2700	>80	E	-	IGBT/Triac*

p. 296



50/60 cm variable

Ø 9x5 cm


flex Ø 0,85 cm: 9x75 cm

Turciù / 9 flex / wall lamp

TR9LNC / nickel flex (nickel lampholder) / satin nickel base
TR9LBR / brass flex (nickel lampholder) / satin nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-230V	mains voltage LED	E14 bulb	9x3,4W 30,6W	3420	2700	>80	E	-	IGBT/Triac*

p. 299



50/60 cm variable

Ø 9x2,5 cm

flex Ø 0,85 cm: 5x75 cm


Turciù / 5 flex / wall lamp

TR5LNC / nickel flex (nickel lampholder) / nickel base
TR5LBR / brass flex (nickel lampholder) / nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-230V	mains voltage LED	E14 bulb	5x3,4W 17W	1900	2700	>80	E	-	IGBT/Triac*



p. 298

**Turciù / 3/2 flex / wall lamp**TR3LNC / Turciù 3 / nickel flex (nickel lampholder) / nickel base
TR3LBR / Turciù 3 / brass flex (nickel lampholder) / nickel base


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-230V	mains voltage LED	E14 bulb	3x3,4W 10,2W	1140	2700	>80	E	-	IGBT/Triac*

TR2LNC / Turciù 2 /nickel flex (nickel lampholder) / nickel base
TR2LBR / Turciù 2 / brass flex (nickel lampholder) / nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110V (bulbs not supplied)-230V	mains voltage LED	E14 bulb	2x3,4W 6,8W	760	2700	>80	E	-	IGBT/Triac*

flex Ø 1,3 cm: 3/2x50 cm
on request available with flex Ø 0,85 cm

p. 301


**Bonsai / table lamp**

BNLBR / LED / brass flex (nickel lampholder) / iron base / black cable and dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
230V (110V available on request / bulbs not supplied)	mains voltage LED	E14 bulb	12x2,5W 30W	1980	2700	82	G	-	included

flex Ø 0,6 cm: 12x60 cm

p. 303


**Albero della Luce / standing lamp**

ALLBR / brass flex (nickel lampholder) / iron structure / black cable

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available on request / bulbs not supplied)	mains voltage LED	E14 bulb	36x4W 144W	14400	2700	80	F	-	wireless (remote control included)

flex Ø 0,85 cm: 36x150 cm

p. 278

**Sottovento / standing lamp**SVLNC / nickel flex (nickel lampholder) / iron structure / black cable and dimmer
SVLBR / brass flex (nickel lampholder) / iron structure / black cable and dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
230V (110V available on request / bulbs not supplied)	mains voltage LED	E14 bulb	15x3,4W 51W	5700	2700	>80	E	-	included


base 40x40 cm / flex Ø 1,2: 15x150 cm

Oggetti Senza Tempo

[Finishes] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Copper** is a very malleable and ductile metal, chosen for its high thermal and electrical conductivity, as well as for its typical reddish-orange colour. We use it untreated, therefore it may oxidise with time, forming a green patina. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / (**) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard. / (***) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation. / (****) 230V version available with not interchangeable EU plug only - memory 100%.

p. 319




For You / USB table lamp

FY / white rice paper shade / brass base / blue stem and cable

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 350 mA	amber LED board	1x1W	93,5	1878	58	-	USB plug driver 5V@1,2A (EU or UK plug only)	push included

p. 321




Miracolo / table candle holder

MRBR / brass flex and details

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	candle (included)	-	-	-	-	-	-	-	-

p. 323




Lola / table lamp

LBR / brass structure / copper stick / black wire / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 350 mA	LED board	3x1W 3W	447	2700	85	D	constant current plug driver**	push included (memory last step)

p. 325




Lola / standing lamp

LFBR / brass structure / copper stick / black wire
 LFBRM / brass structure / copper stick / black dimmer and wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	constant current LED 350 mA	LED board	3x1W 3W	447	2700	85	D	constant current plug driver (EU plug only)	touch included (memory 100%)
110-240V								constant current plug driver**	push included (memory last step)

p. 326




Luce che dipinge / wall lamp

LD5L / white canvas / black pipe / black wrap screen

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available on request)	low voltage LED 12Vdc	G4 bulb	1x0,8W	70	2700	82	G	constant voltage driver	NO

p. 328




Herem / USB table lamp

HRT / brass flex and shade

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant voltage LED 5V	LED board	1x2,8W	300	2700	>90	D	USB plug driver 5V (EU or UK plug only)	included touch-less

p. 331




Nike / table lamp

NKL / white ceramic chalk statue / nickel flex / glass lens / blue wire / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V****	constant current LED 350 mA	LED board	1x1W	149	2700	85	D	constant current plug driver*****	push included (memory last step)

p. 334




Shadow / standing lamp with net

SW / black structure / brass net / black wire and dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 350 mA	LED board	1x1W	149	2700	85	D	constant current plug driver**	push included (memory last step)

p. 337



U. / wall lamp

UWJB / black base and shade / brass joint

UWJW / white base and shade / brass joint


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V (110V available not dimmable)	constant current LED 270 mA	COB LED	1x9W	1324	2700	>80	E	constant current driver	IGBT/Triac***

CicloItalia

[Finishes] // **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 308




CicloItalia / table lamp

CIBR / brass base and structure / black dimmer / black wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED 500 mA	COB LED	1x5W	569	2700	>80	F	constant current plug driver*	push included (memory last step)

p. 311



CicloItalia / standing lamp

CIFBR / black base / brass structure / black wire
 CIFBRM / black base / brass structure / black dimmer and wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
230V	constant current LED 350 mA	COB LED	1x5W	569	2700	>80	F	constant current plug driver (EU plug only)	touch included (memory 100%)
110-240V								constant current plug driver*	push included (memory last step)

p. 312




CicloItalia / wall lamp with flex

CIW1B / black base and spotlight / brass flex and details / glass lens / with on/off
 CIW1W / white base and spotlight / brass flex and details / glass lens / with on/off

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 230V	low voltage LED 12V	GU 5.3 bulb	1x7,5W	630	3000	90	F	constant voltage driver	NO on/off switch

base: 17x5x4 cm ca.

p. 311



CicloItalia / standing lamp with flex

CIF3BM / black rod/base/spotlights / brass flex and details / glass lens
 CIF3WM / white rod/base/spotlights / brass flex and details / glass lens

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	low voltage LED 12V	GU 5.3 bulb	3x7,5W 22,5W	1890	3000	90	F	constant voltage plug driver*	push included (memory last step)




Other Smiths

[Finishes] // **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 341




Talismano / table lamp

TLST / brass/iridescent glass / black dimmer and wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant voltage 24V LED	LED flexible board	6W	2187	2700	>80	D	constant voltage plug driver*	push included (memory last step)

p. 343

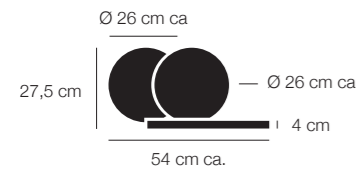

Alchemie / table lamp

AHT / brass disc / alabaster diffuser / Medea limestone base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant voltage 24V LED	LED strip	12W	1300	3000	90	G	constant voltage plug driver*	push included






Medousê (outdoor)

[Finishes] // **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) Mains voltage LED modules and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED. Some dimmers on the market have a NO button (Normally Open) or are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes. Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available. It is important to note that during adjustment the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer. / (**) IP specifics: LED module IP64; IP average rate of the lamp 44. / (***) The LED modules 110V provided for Medousê have a starting temperature of 2.700K, as indicated in the manufacturer's datasheets. For their outdoor use, a protective resin is applied, which increases the temperature by 800K (CCT - correlated colour temperature), reaching approximately 3.200K. Currently, it is not possible to provide a colour temperature different from this.

p. 353



Medousê / wall lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MD3P / green glass / brass rod	230V	mains voltage LED**	LED board IP64	1x15W	1300	2850	>80	F	-	IGBT/Triac*
MD3PTR / transparent glass / brass rod	(110V)	(mains voltage LED**)	(LED board IP64)	(1x14W)	(1540)	(3200***)	(80)	(A+)	-	(IGBT/Triac*)

p. 354



Medousê / floor lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MD3 / Ø 30 cm / green glass / aluminium ring / plug cable not included	230V	mains voltage LED**	LED board IP64	1x15W	1300	2850	>80	F	-	IGBT/Triac*
MD3TR / Ø 30 cm / transparent glass / aluminium ring / plug cable not included										
MD5 / Ø 50 cm / green glass / aluminium ring / plug cable not included	(110V)	(mains voltage LED**)	(LED board IP64)	(1x14W)	(1540)	(3200***)	(80)	(A+)	-	(IGBT/Triac*)
MD5TR / Ø 50 cm / transparent glass / aluminium ring / plug cable not included										

weight: Ø 30 cm 15 kg / Ø 50 cm 31 kg




More (outdoor)

[*Finishes*] // **Zinc plated steel** is the material of the stems of the More collection. They are suitable for outdoor installation, but they are not immersion proof. / **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[*Cables*] // (**s**) suspension cable. / (**el**) electrical cable.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) IP specifics: lampholder IP65 (not protected against immersion); wires IP68.

p. 359



More / floor lamp / driver and accessories not incl. (see pages 114-119)


MR0 / transparent glass / grey-transparent cable 300 cm

MR0A / amber glass / grey-transparent cable 300 cm

MR0GR / green glass / grey-transparent cable 300 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	low voltage LED 12Vdc	G4 bulb (IP65 lampholder)*	1x0,8W	70	2700	82	G	not included available on request	-

p. 360



More / pendant lamp / driver and accessories not incl. (see pages 114-119)

MRS / transparent glass / steel cable^(s) / grey-transparent cable^(el)


MRSA / amber glass / steel cable^(s) / grey-transparent cable^(el)

MRSGR / green glass / steel cable^(s) / grey-transparent cable^(el)

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	low voltage LED 12Vdc	G4 bulb (IP65 lampholder)*	1x0,8W	70	2700	82	G	not included available on request	-

weight 1 kg

p. 362



More / standing lamp / driver and accessories⁽¹⁾ not incl. (see pages 114-119)

MR70 / H 70 cm / steel stem / transparent glass / grey-transparent cable 210 cm

MR70A / H 70 cm / steel stem / amber glass / grey-transparent cable 210 cm

MR70GR / H 70 cm / steel stem / green glass / grey-transparent cable 210 cm

MR100 / H 100 cm / steel stem / transparent glass / grey-transparent cable 170 cm

MR100A / H 100 cm / steel stem / amber glass / grey-transparent cable 170 cm

MR100GR / H 100 cm / steel stem / green glass / grey-transparent cable 170 cm

MR130 / H 130 cm / steel stem / transparent glass / grey-transparent cable 150 cm

MR130A / H 130 cm / steel stem / amber glass / grey-transparent cable 150 cm

MR130GR / H 130 cm / steel stem / green glass / grey-transparent cable 150 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	low voltage LED 12Vdc	G4 bulb (IP65 lampholder)*	1x0,8W	70	2700	82	G	not included available on request	-


⁽¹⁾ supporting plate (code MSMP) or peg (code MPT) necessary for mounting

Sypha (outdoor)

[*Finishes*] // **Stems** - the stems of the Sypha collection are made of brass (Syphaduepassi) or black coloured iron (Syphasera and Syphasfera). / **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[*Note*] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / **(*)** IP specifics: lamp holder IP65 (not protected against immersion); wires and connectors IP68; not resistant to salt fog.

p. 367

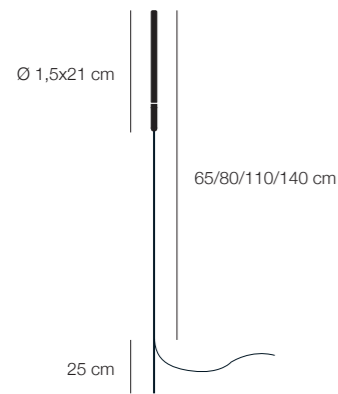


Syphasera / standing lamp / driver and accessories not incl. (see pages 114-119)

SYS65 / H 65 cm / black stem / brass details / opaline glass / grey-transparent cable 255 cm
SYS80 / H 80 cm / black stem / brass details / opaline glass / grey-transparent cable 240 cm
SYS110 / H 110 cm / black stem / brass details / opaline glass / grey-transparent cable 210 cm
SYS140 / H 140 cm / black stem / brass details / opaline glass / grey-transparent cable 180 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	low voltage LED 12Vdc	G4 bulb (IP65 lampholder)*	1x0,8W	70	2700	82	F	not included available on request	-

p. 368

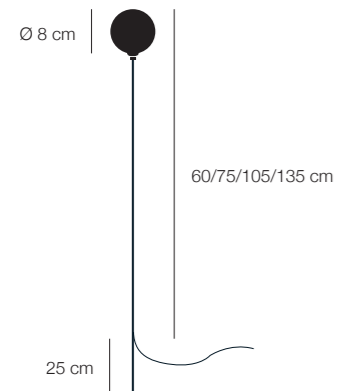


Syphasfera / standing lamp / driver and accessories not incl. (see pages 114-119)

SYF60 / H 60 cm / black stem / brass details / transparent glass / grey-transparent cable 255 cm
SYF60I / H 60 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 255 cm
SYF75 / H 75 cm / black stem / brass details / transparent glass / grey-transparent cable 240 cm
SYF75I / H 75 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 240 cm
SYF105 / H 105 cm / black stem / brass details / transparent glass / grey-transparent cable 210 cm
SYF105I / H 105 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 210 cm
SYF135 / H 135 cm / black stem / brass details / transparent glass / grey-transparent cable 180 cm
SYF135I / H 135 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 180 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	low voltage LED 12Vdc	G4 bulb (IP65 lampholder)*	1x0,8W	70	2700	82	G	not included available on request	-

p. 371



Syphaduepassi / standing lamp / driver and accessories not incl. (see pages 114-119)

SYD45 / H 45 cm / brass stem and details / grey-transparent cable 225 cm
SYD75 / H 75 cm / brass stem and details / grey-transparent cable 195 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	low voltage LED 12Vdc	G4 bulb (IP65 lampholder)*	1x0,8W	70	2700	82	F	not included available on request	-


Fil de Fer (outdoor)

[Finishes] // **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[Cables] // (**s**) suspension cable. / (**el**) electrical cable.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (*) The drivers for the dimmable version of our outdoor products are larger than their not-dimmable standards. They are available on request with custom sized bases and boxes (see our website for further references). / (**) IP specifics: lampholder IP65 (not protected against immersion); wires and connectors IP68; drivers IP67; IP average rate of the lamp 65.

p. 375



Fil de Fer / outdoor pendant lamp


F5SIPL / Ø 50 cm / aluminium / steel cables ^(s) / metal braided cable ^(el) / chrome base
F5SIPLG / Ø 50 cm / gold / steel cables ^(s) / metal braided cable ^(el) / chrome base
F7SIPL / Ø 70 cm / aluminium / steel cables ^(s) / metal braided cable ^(el) / chrome base
F7SIPLG / Ø 70 cm / gold / steel cables ^(s) / metal braided cable ^(el) / chrome base
F10SIPL / Ø 100 cm / aluminium / steel cables ^(s) / metal braided cable ^(el) / chrome base
F10SIPLG / Ø 100 cm / gold / steel cables ^(s) / metal braided cable ^(el) / chrome base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110V or 230V	low voltage LED 12Vdc	G4 bulbs (IP65 lampholder)**	8x0,8W 6,4W	560	2700	82	G	constant voltage driver IP67	NO
			16x0,8W 12,8W	1120					
			20x0,8W 16W	1400					

weight: Ø 50 8,5 kg / Ø 70 13 kg / Ø 100 18 kg

Further dimensions available on request.

p. 376



Fil de Fer / outdoor floor lamp


F5IPL / Ø 50 cm / aluminium / metal braided cable / black box and plug cable
F5IPLG / Ø 50 cm / gold / metal braided cable / black box and plug cable
F7IPL / Ø 70 cm / aluminium / metal braided cable / black box and plug cable
F7IPLG / Ø 70 cm / gold / metal braided cable / black box and plug cable
F10IPL / Ø 100 cm / aluminium / metal braided cable / black box and plug cable
F10IPLG / Ø 100 cm / gold / metal braided cable / black box and plug cable

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
230V (110V available on request)	low voltage LED 12Vdc	G4 bulbs (IP65 lampholder)**	8x0,8W 6,4W	560	2700	82	G	constant voltage driver IP67	NO
			16x0,8W 12,8W	1120					
			20x0,8W 16W	1400					

cable 12V 450 cm ca. / cable 230V 200 cm ca.
(with EU or CH plug / UK plug with 300 cm extra)

Further dimensions available on request.

p. 381

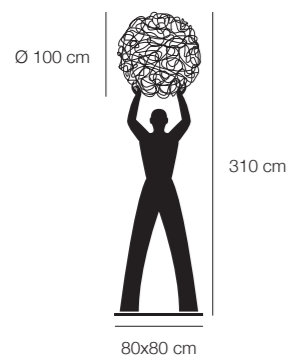

Uomo della Luce XXL / outdoor standing lamp

UIPL / rough iron structure / aluminium sphere / black cable, box and plug cable
--

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
230V (110V av. on request)	low voltage LED 12Vdc	G4 bulbs (IP65 lampholder)**	20x0,8W 16W	1400	2700	82	G	constant voltage driver IP67	NO

cable 12V 400 cm ca. / cable 230V 200 cm ca.
(with EU or CH plug / UK plug with 300 cm extra)




Limited edition

[Finishes] // **Untreated brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. It may oxidise, therefore regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[Note] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).

p. 387




Trenta / battery table lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
TRENTA / glass bulb / brass-coated cover	Li-ION 3,7V 1180 mAh	constant voltage	LED board	1x1W	100	2700	80	A+	input 110/240V output 5V@1,2 A (EU or UK plug only)	NO on/off switch included




LEDERAM: COLOUR COMBINATIONS AND DETAILS

TECHNICAL INFORMATION

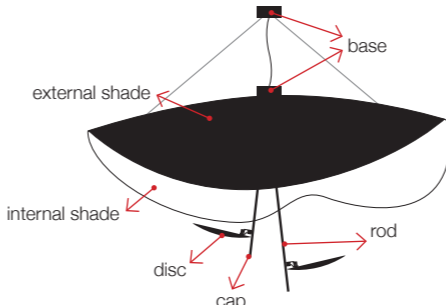Lederam Manta S2	code	shade		rods	caps	discs	bases
		external	internal				
	3	black	gold	black	black	gold	black
	4	black	copper	black	black	copper	black
	5	white	white	gold	gold	white	white
	6	white	gold	satin	satin	white	white
	8	white	white	satin	satin	white	white

Lederam Manta S1 / CWS1 / C150 / C180	code	shade		rod	cap	disc	base
		external	internal				
	3	black	gold	black	gold	gold	black
	4	black	copper	black	copper	copper	black
	5	white	white	gold	gold	white	white
	6	white	gold	satin	gold	white	white
	8	white	white	satin	gold	white	white
	10	white	white	white	gold	white	white

Lederam C2	code	discs	rods	caps	base
	2	black	satin	satin	black
	3	gold	black	black	black
	4	copper	black	black	black
	5	white	gold	gold	white
	6	white	satin	satin	white



Lederam W	code	disc 1		disc 2		base
		external	internal	internal	external	
	1	black	copper	copper	black	black
	2	black	gold	gold	black	black
	3	gold	gold	gold	white	white
	4	copper	copper	copper	white	white
	5	white	gold	gold	white	white
	6	white	copper	copper	white	white



Lederam F1 / F2 / F3	code	discs	rods	caps	base	cable	dimmer
	2	black	satin	satin	black	black	black
	3	gold	black	black	black	black	black
	4	copper	black	black	black	black	black
	5	white	gold	gold	white	white	white
	6	white	satin	satin	white	white	white

Lederam W1	code	disc		joint	base
		external	internal		
	1	black	black	nickel	black
	3	gold	black	nickel	black
	4	copper	black	nickel	black
	6	white	white	nickel	white

Lederam F0	code	disc	rod	cap	base	cable	dimmer
	2	black	satin	satin	black	black	black
	3	gold	black	black	black	black	black
	4	copper	black	black	black	black	black
	6	white	satin	satin	white	black	black
	12	brass	black	black	black	black	black

Lederam WF	code	disc		base
		external	internal	
	1	black	black	black
	3	gold	white	white
	4	copper	white	white
	6	white	white	white

Lederam T1	code	disc	rod	cap	base	cable	dimmer
	2	black	satin	satin	black	black	black
	3	gold	black	black	black	black	black
	4	copper	black	black	black	black	black
	5	white	gold	gold	white	blue	black
	6	white	satin	satin	white	blue	black



MAINS VOLTAGE LED

The LED boards and COB LED we supply in the Lederam (exception made for Lederam F0 and T1) and Medousê collection can be connected directly to the mains voltage because they do not require any driver (other than the one already mounted on the module). Compared to traditional light sources, mains voltage LED boards are more sensitive to any interference in the electricity mains, including voltage fluctuation and harmonic distortion, because they have a faster response to changes in voltage.

This means that consequently to this variations occasional flickering or functioning anomaly may occur, but since not depending on the product, they cannot be considered a flaw or defect.

Further than by problems on the line voltage, fluctuations and harmonics may be produced by variable power loads, as those caused by many types of motors and electronic devices. In case of anomalies we suggest to check the electrical system to apply protective modules reducing overvoltage at the connection terminals of electronic components. By means of this modules / filters, any residual voltage is then reduced to an appropriate protective level in relation to the discharge current.

Dimming

Mains voltage LED boards and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources.


Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED.

Some dimmers on the market have a NO button (Normally Open button) or they are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes.

Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available.


It is important to note that during adjustment (for instance with a cord dimmer) the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer.

LED boards

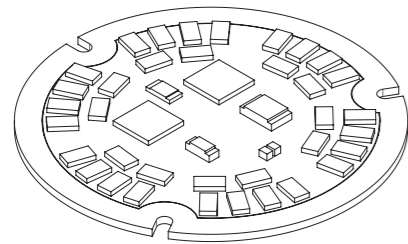

15W
14W


COB LED




9W
15W




NO (Normally Open) Button

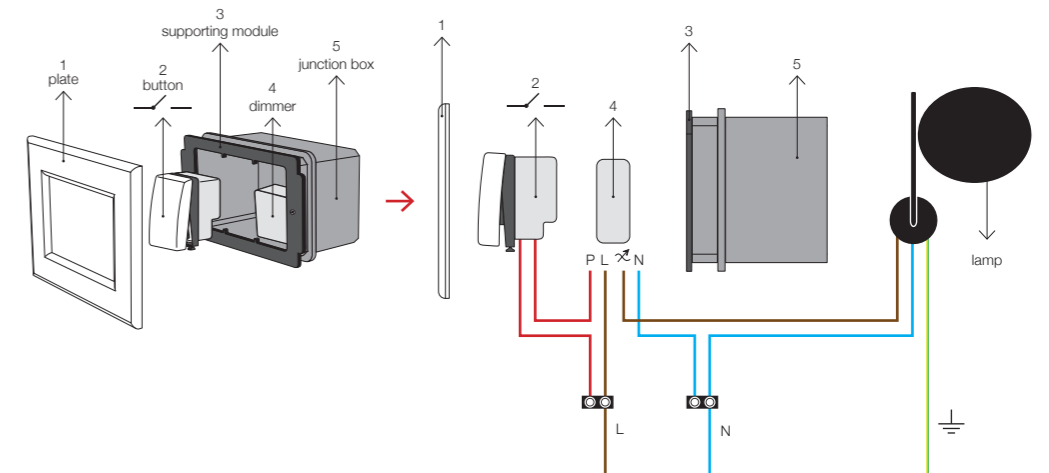

Socket-mounted or recessed


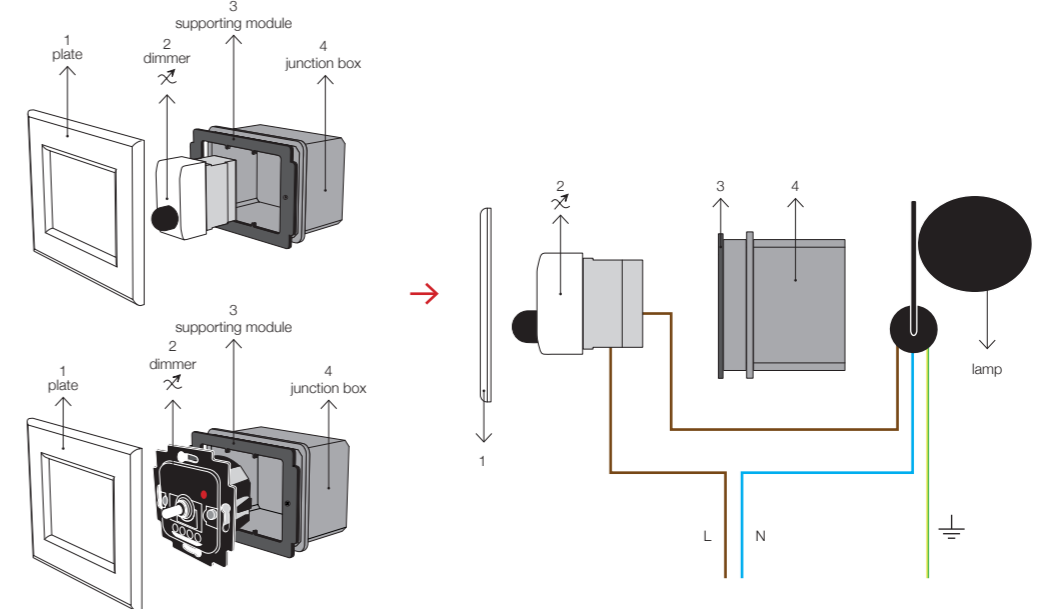


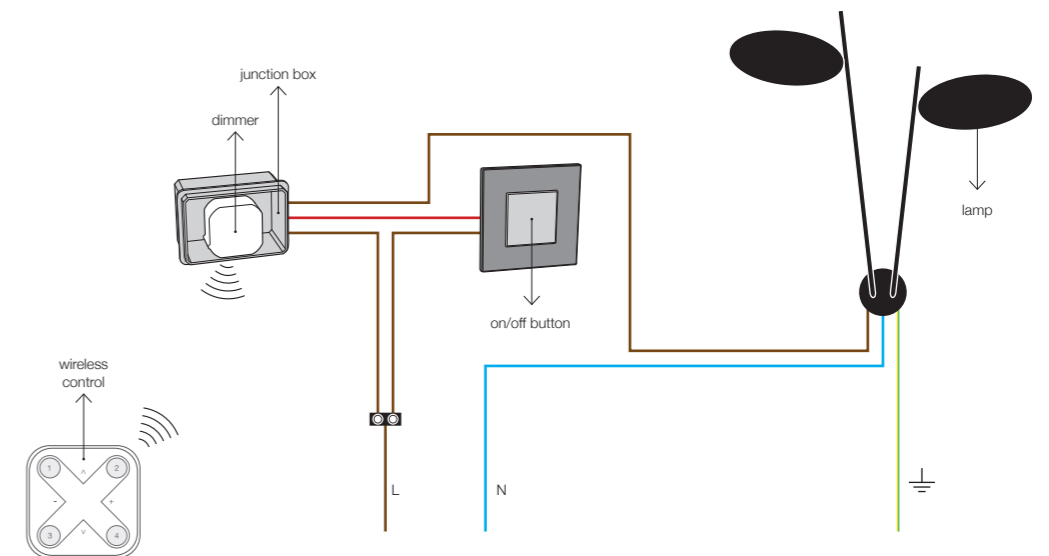


Wireless



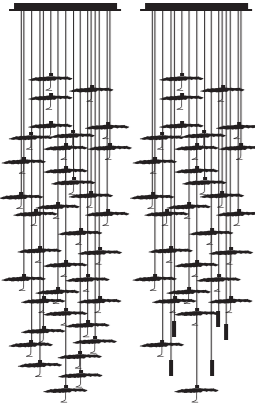

CHANDELIER

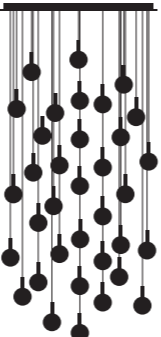GOLD MOON	JACKIE O	POSTKRISI	SWEET LIGHT	PAR 18
<p>Gold Moon Chandelier is supplied with single pendants with black wires, irregular black/gold shade Ø 20 cm ca. and copper curl directing the beam of light upwards to the shade. Each shade is handmade, therefore the dimensions can slightly change from pendant to pendant. On request it is available also with Spot Light pendants, suggested to add some direct light downwards to the composition.</p> 	<p>Jackie O Chandelier is supplied with single pendant with blue cable and nickel curl with lens, to define the beam of light of each pendant.</p> 	<p>PostKrisi Chandelier is supplied with natural fibreglass spheres with a diameter of 14 or 20 cm. On request it is also available with spheres in different colours or lined with gold/silver/copper coloured leaf.</p> 	<p>Sweet Light Chandelier is supplied with aluminium spheres with a diameter of 10 cm. On request it is also available with brass or silver coloured spheres.</p> 	<p>Par 18 Chandelier is supplied with single pendants with black wires, irregular glass spheres dia. 8 or 16 cm with black/brass supports. On request it is available also with Spot Light pendants, suggested to add some direct light downwards to the composition.</p> 


Bases

The Chandeliers are supplied with satin steel bases in different dimensions.



square

30x30x5 cm / 60x60x5 cm



rectangular


150x30x5 cm / 150x60x5 cm / 90x30x5 cm



round

Ø 40 cm / Ø 78 cm

The bases of the Chandeliers are modular and very easy to install. The satin finish steel plates are anchored to the white painted metal frame by means of suspension chains that facilitate both installation and maintenance. They are then secured in place with square head screws; the nickel cube that covers the screw remains exposed (see drawing). Bases are available on request with different colours.

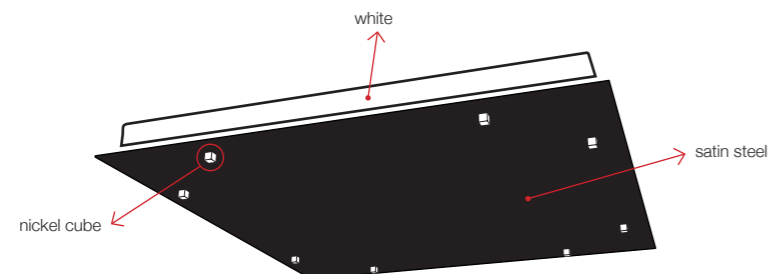


GOLD MOON	JACKIE O	POSTKRISI	SWEET LIGHT	PAR 18
-----------	----------	-----------	-------------	--------

Standard Jack Mounting (NOT ADJUSTABLE HEIGHT)

Each pendant is mounted onto the base by means of a connection jack that fits in and locks in place in a simple motion. The base can therefore be shipped separately from the pendants, facilitating both the shipping and installation itself.

STANDARD

The standard maximum height of the codified Jackie O/Gold Moon Chandeliers is 120/300 cm (obtained from H of base 5 cm + max pendant height of 115/295 cm).

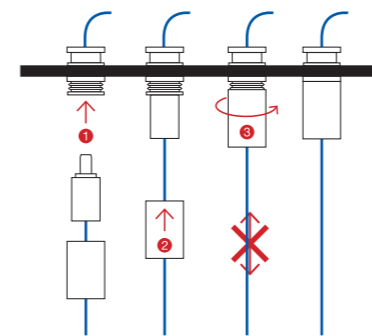

ON REQUEST


By choosing the maximum cable length (up to max 300 cm – dimensions rounded up to the nearest 5 cm) and downsizing while retaining the proportions of the standard codes, a custom made composition can be produced.

Any further customisation entails a bespoke design requiring a quotation (customized production).

NB Each capillary is manually bent. A tolerance of about 1 to 2 cm on the given cables lengths must be considered as acceptable

STANDARD

The standard maximum heights of the codified PostKrisi/Sweet Light/Par 18 Chandeliers are 180/300/400 cm (obtained from H of base 5 cm + max pendant height of 175/295/395 cm).

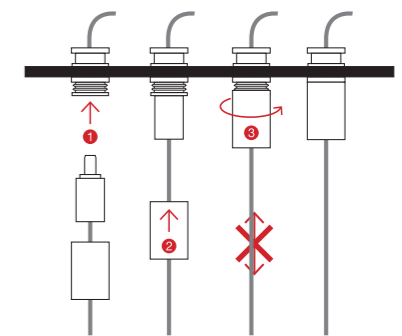

ON REQUEST

By choosing the maximum cable length (up to max 300 cm – dimensions rounded up to the nearest 5 cm) and downsizing while retaining the proportions of the standard codes, a custom made composition can be produced.

Any further customisation entails a bespoke design requiring a quotation (customized production).


On Request (ADJUSTABLE HEIGHT)

TENSIONER

The version with a tensioner is available in those cases where the length of the cable requires adjustment during installation.


The tensioner is supplied disassembled.

Once you have placed the cable at the desired height, it must be cut and reconnected to the inside of the base (this operation helps preventing voltage drops and tangled cables inside the base).



CABLE FASTENER

The version with cable fastener is available in those cases where the length of the cable requires adjustment during installation. The cable fastener is supplied disassembled; the type of fastener may vary according to the pendant. Once you have placed the cable at the desired height, it must be cut and reconnected to the inside of the base (this operation helps preventing voltage drops and tangled cables inside the base).




Custom

On request we can supply customized designs with different base dimensions, a different number of pendants or with a tensioner instead of a jack connection.




MACCHINA DELLA LUCE LED BOARDS

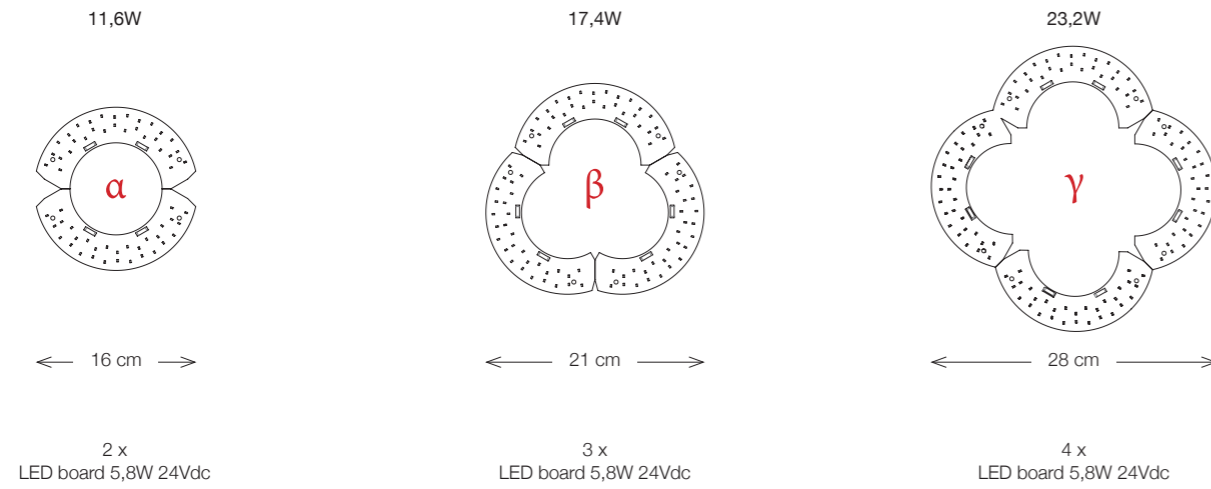

Mod. A		Mod. E	
17,4W β	Ø 80 cm	11,6W α	Ø 50 cm
11,6W α	Ø 30 cm	11,6W α	Ø 30 cm
11,6W α	Ø 18 cm	Ø 18 cm	
40,6W	5040 lumen	23,2W	2880 lumen
Mod. B		Mod. F**	
11,6W α	Ø 80 cm	23,2W γ	Ø 120 cm
Ø 18 cm		17,4W β	Ø 80 cm
11,6W	1440 lumen	Ø 50 cm	
		11,6W α	Ø 30 cm
40,6W	5040 lumen	29W	3600 lumen
Mod. C		Mod. I	
23,2W γ	Ø 120 cm	17,4W β	Ø 80 cm
17,4W β	Ø 80 cm	Ø 50 cm	
Ø 50 cm		11,6W α	Ø 30 cm
40,6W	5040 lumen	58W	7200 lumen
Mod. D*		* 110V version available with 4x α 11,6W / tot. 46,4W max	
17,4W β	Ø 120 cm	** 110V version available with 2x β 17,4W / 1x α 11,6W / tot. 46,4W max	
17,4W β	Ø 80 cm		
11,6W α	Ø 50 cm		
11,6W α	Ø 30 cm		
11,6W α	Ø 18 cm		






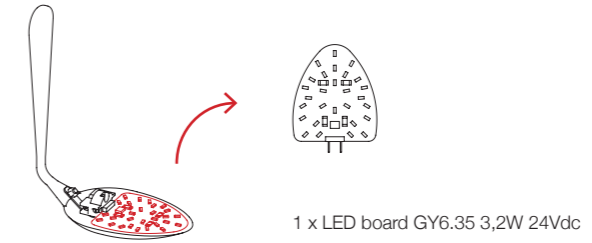


STCHU-MOON LED BOARDS







1x 3,2W / 430 lumen			Stchu-Moon 05
			Stchu-Moon 01 Ø 40 cm
			Stchu-Moon 01 Ø 60 cm
2x 3,2W / 860 lumen			Stchu-Moon 09
			Stchu-Moon 02 Ø 40/60 cm
4x 3,2W / 1720 lumen			Stchu-Moon 02 Ø 80/100 cm
6x 3,2W / 2580 lumen	3x		Stchu-Moon 02 Chandelier

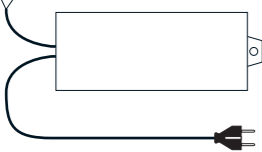
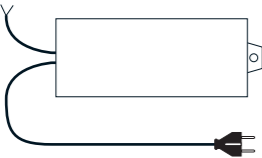
**OUTDOOR: GEL BOX SYSTEM**

	MB1 Mini gel box IP68
	5,3x3,9x2,4 cm
	(max 2 connections - connectors included)
	MB2 Mini gel box IP68
	5,2x5,3x2,9 cm
	(max 6 connections - connectors included)
	KP1 Extension cord kit
	5 mt
	with mini gel box IP68 for single connection
	(max 1 lamp)
	ED6 Driver 10W 12Vdc 220-240V IP67
	7x3,7x2,3 cm / cables 45 cm ca.
	not dimmable
	(max 9 lamps)
	ED7 Driver 30W 12Vdc 220-240V IP67
	11x3,7x2,3 cm / cable 12V 45 cm ca. / plug cable 200 cm
	not dimmable
	(max 28 lamps)
	ED7D Driver 30W 12Vdc 220-240V IP67
	11x3,7x2,3 cm / cables 12V 45 cm ca. / plug cable 200 cm
	Triac dimmable
	(min. 12 max 28 lamps)

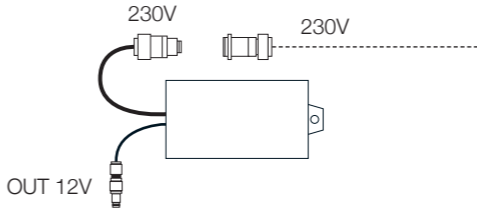**OUTDOOR: QUICK CONNECTORS SYSTEM**

	ED6CR Driver 10W 12Vdc 220-240V IP67
	230V and 12V connectors included
	3,7x2,3x7 cm - cables 45 cm ca.
	not dimmable
	CRM Quick IP68 multiple connector / 1 IN & 5 OUT 12V
	(max 5 connections)
	CRS Quick IP68 IN single connector
	(max 1 connections)
	KP2 Extension cord kit with quick IP68 connectors CRS
	5 mt
	(max 1 lamp)

OUTDOOR: FIL DE FER

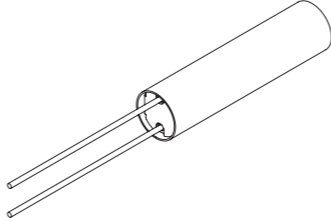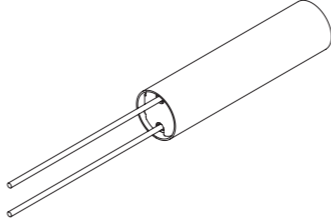	FKIPL Kit box driver
	Ø 5x20 cm / cable 12V 45 cm / plug cable 200 cm
	not dimmable (driver ED7)
	standard
	FKIPLD Kit box driver
	Ø 5x20 cm / cable 12V 45 cm / plug cable 200 cm
	Triac dimmable (driver ED7D)
	available on request



OUTDOOR ACCESSORIES

	MSMP Supporting modular plate
	for More (MR70/MR100/MR130)
	32x32x32 cm
	(max 3 lamps)
	MPT Peg
	for More (MR70/MR100/MR130)
	25 cm
	MSM Supporting plate
	for Medousê F
	31x31 cm ca.
	MDCV Plug cable 230V standard EU (CH or UK available on request)
	for Medousê F
	350 cm




MEDOUSÊ INSTALLATION SUGGESTIONS

WARNING

For stability reasons the lamp must be fastened to a solid surface such as a well or basement; in alternative it can be mounted on the modular supporting plate (code MSM) available on request. Before installing the lamp, please check the levelling of the soil and make sure that it can support the weight of the fitting.



(Medousê weight Ø 30 cm 15 kg / Ø 50 cm 31 kg)



lamp base with holes for the fastening
(plugs not included)



Example 1

with basement and supply cable from the side

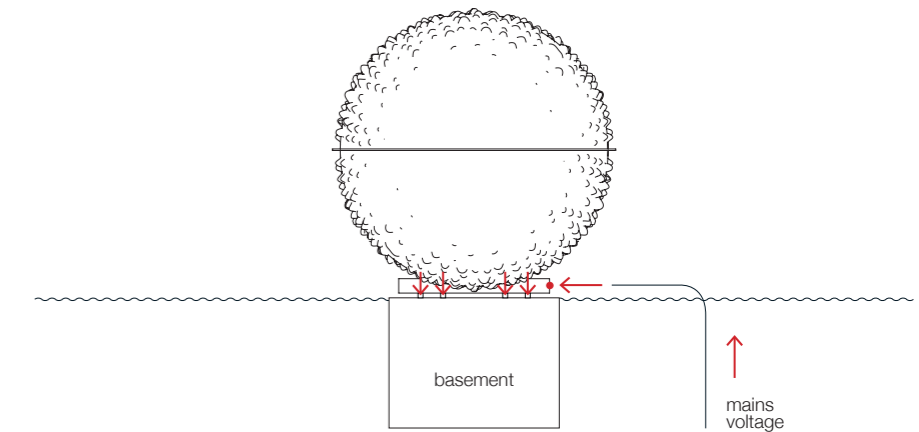



Example 2

with well and supply cable from underneath

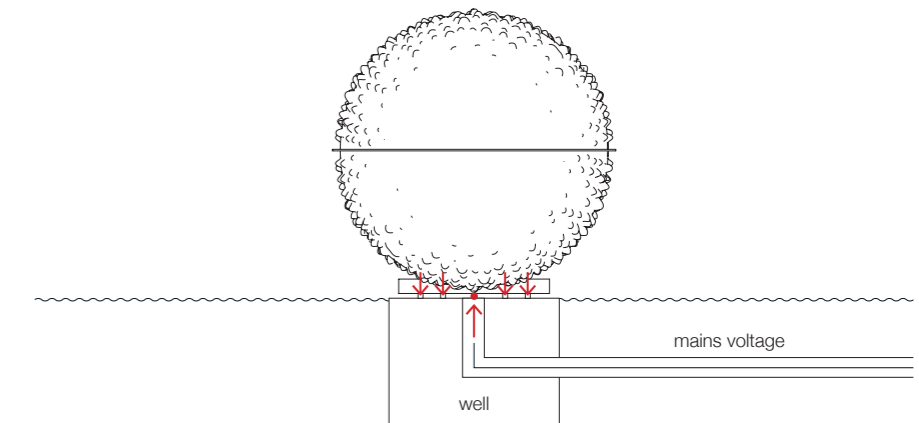


Example 3

with supporting plate 1x code MSM
with plug cable 230V 1x code MDCV

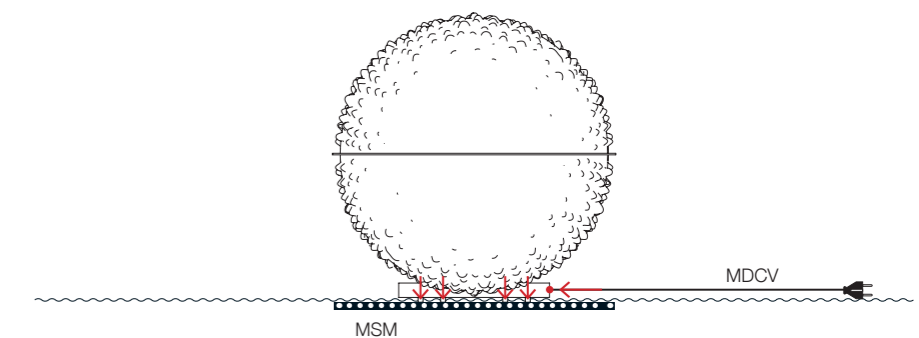


Installation suggestions for Outdoor / GEL BOX system


1	Connection type	For models	Power supply	Access. applied
	GEL BOX system (without well)	Syphasera/Syphasera/Syphaduepassi/More	code ED6	1x code ED6 1x code MB1 1x code MB2

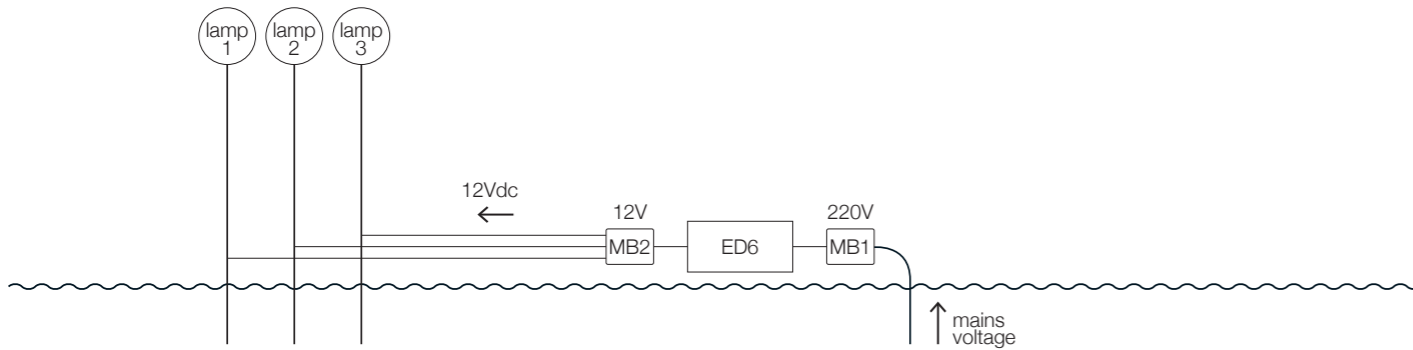


2	Connection type	For models	Power supply	Access. applied
	GEL BOX system (with well)	Syphasera/Syphasera/Syphaduepassi/More	provided by client	1x code MB2 1x code KP1

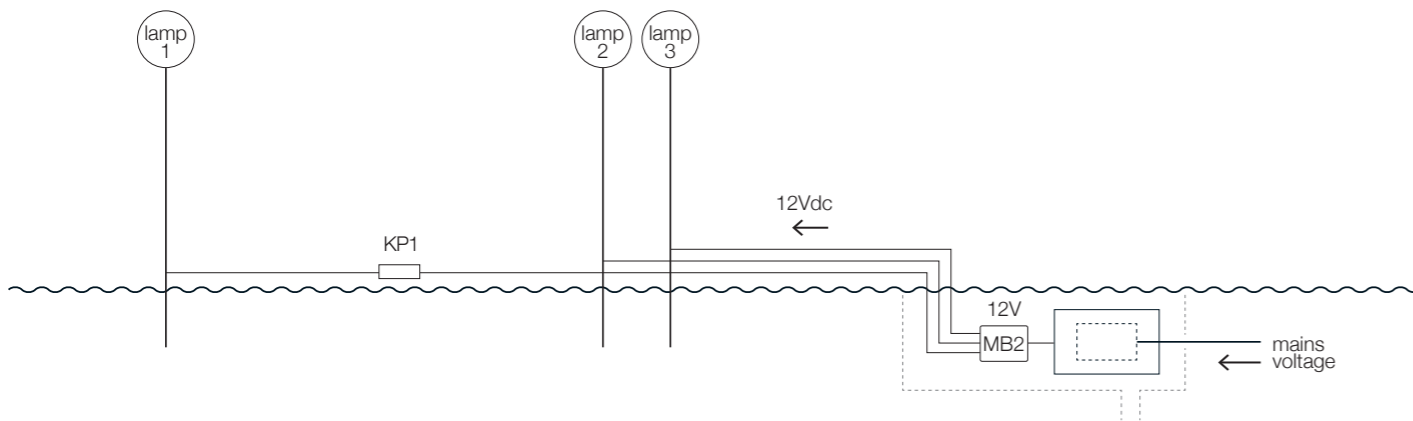


3	Connection type	For models	Power supply	Access. applied
	GEL BOX system (without well)	More (MR70/MR100/MR130)	code ED6	1x code ED6 1x code MB1 1x code MB2 1x code MSMP

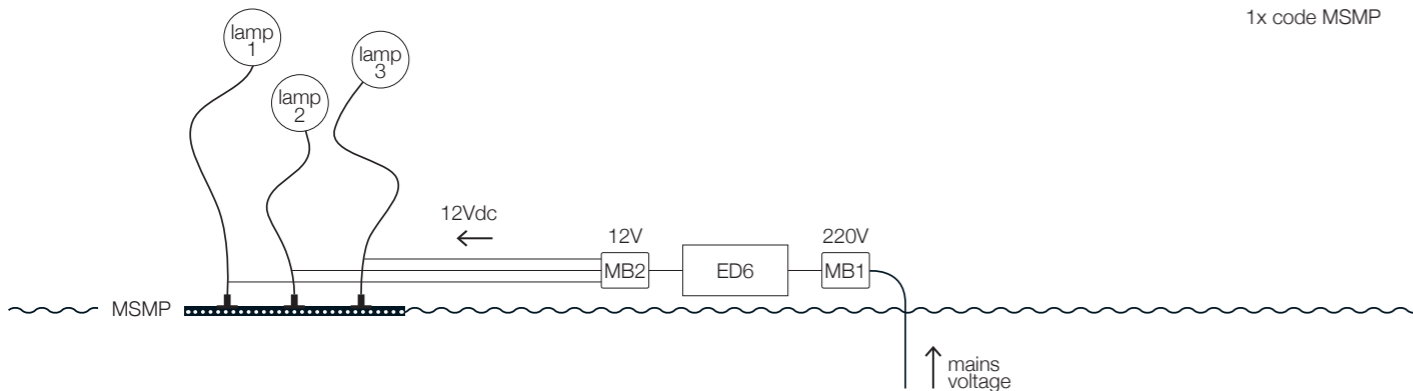


4	Connection type	For models	Power supply	Access. applied
	GEL BOX system (with well)	More (MR70/MR100/MR130)	provided by client	1x code MB2 3x code MPT

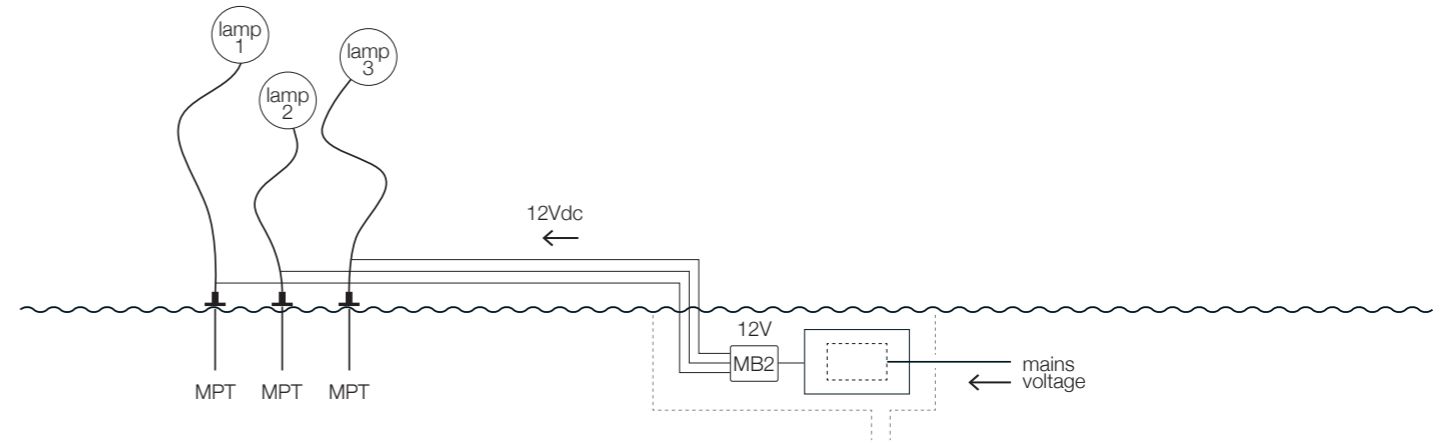


5	Connection type	For models	Power supply	Access. applied
	QUICK CONNECTORS system	Syphasera/Syphasera/Syphaduepassi/More	code ED6CR	1x code ED6CR 1x code CRM 5x code CRS 1x code KP2

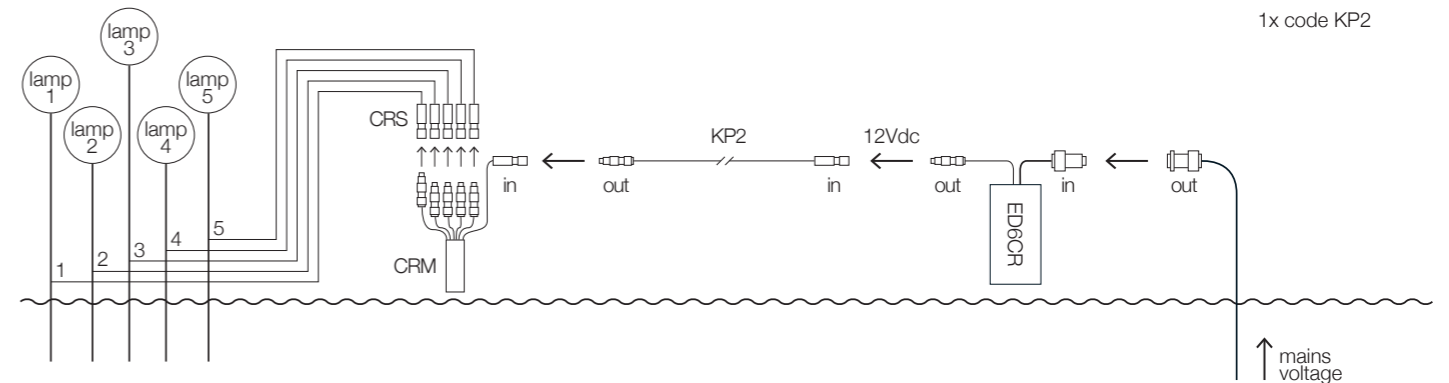


6	Connection type	For models	Power supply	Access. applied
	QUICK CONNECTORS system	Syphasera/Syphasera/Syphaduepassi/More		2x code CRM 9x code CRS

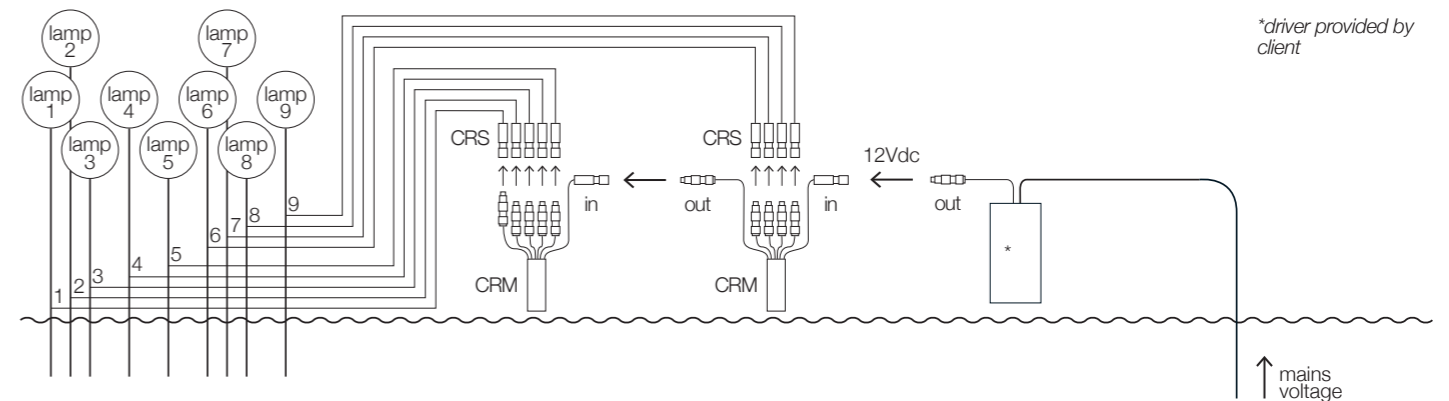

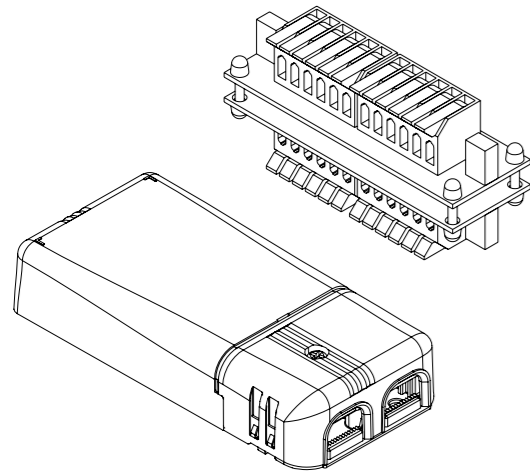**PSU (POWER SUPPLY UNIT) KITS FOR JACKIE O/GOLD MOON/PAR 18/SPOTLIGHT IC-JC**

By means of the PSU kit, multiple LED lamps can be controlled simultaneously through a connection board connected to a driver.
 The basic board can connect up to 12 lamps; we can combine 2 boards to connect up to 24 lamps.
 It is advisable to install the kit in a technical compartment at a maximum distance of about 5 meters from the point of installation of the jacks or tensioners, in order to avoid voltage drops.
 The technical compartment must be located in an easily accessible place and large enough to accommodate both the wired multiple connection board and the power supply.

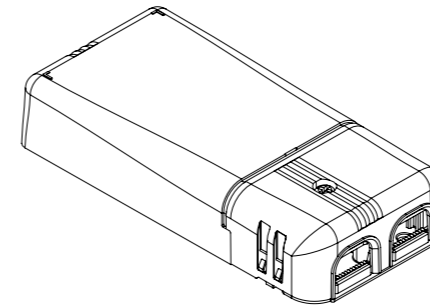**DRIVERS @24Vdc FOR PEPITA 65 / PEPITA 102 / JACKIE O / GOLD MOON / PAR 18 / SPOTLIGHT**

By means of the driver, multiple LED lamps can be controlled simultaneously. In the event of a failure of even a single lamp, the other lamps continue working properly.
 It is advisable to install the driver in a technical compartment accessible for inspection at a maximum distance of about 5 meters from the point of installation of the lamps, in order to avoid voltage drops.
 The technical compartment must be located in an easily accessible place and large enough to accommodate the power supply.

PSU KITS

K9WS12	20W driver kit 230V @24Vdc (with ED9)
	lamps quantity: min 3 / max 12 x1,1W or min 2 / max 10 x1,7W
	Triac dimmable
	driver dimensions 11x5,2x2,2 cm
K10WS12	16W driver kit 110-240V @24Vdc (with ED10)
	rated output 16W @230V // lamps quantity: min 2 / max 12 x1,1W or min 2 / max 10 x1,7W rated output 15W @110V // lamps quantity: min 2 / max 12 x1,1W or min 2 / max 10 x1,7W
	1...10V or PUSH dimmable
	driver dimensions 11x5,2x2,2 cm
K11WS12	16W driver kit 110-240V @24Vdc (with ED11)
	rated output 16W @230V // lamps quantity: min 2 / max 12 x1,1W or min 2 / max 8 x1,7W rated output 15W @110V // lamps quantity: min 2 / max 12 x1,1W or min 2 / max 8 x1,7W
	DALI / DALI2 dimmable
	driver dimensions 11x5,2x2,2 cm
K12WS24	30W driver kit 230V @24Vdc (with ED12)
	lamps quantity: min 13 / max 24 x1,1W or min 13 / max 16 x1,7W
	Triac dimmable
	driver dimensions 18x6x3,5 cm
K13WS24	36W driver kit 110-240V @24Vdc (with ED13)
	rated output 36W @230V // lamps quantity: min 13 / max 24 x1,1W or min 13 / max 18 x1,7W rated output 30W @110V // lamps quantity: min 13 / max 24 x1,1W or min 13 / max 16 x1,7W
	DALI or PUSH dimmable
	driver dimensions 16,5x4,1x3,5 cm


DRIVERS @24Vdc

ED9	rated voltage 230V
	rated output 20W lamps quantity: min 3 / max 13 x1,1W or min 2 / max 10 x1,7W
	Triac dimmable
	dimensions 11x5,2x2,2 cm
ED11	rated voltage 110-240V
	rated output 16W @240V // lamps quantity: min 2 / max 12 x1,1W or min 2 / max 8 x1,7W rated output 15W @110V // lamps quantity: min 2 / max 12 x1,1W or min 2 / max 8 x1,7W
	DALI / DALI2 dimmable
	dimensions 11x5,2x2,2 cm
ED14	rated voltage 110-240V
	rated output 4W lamps quantity: min 1 / max 3 x1,1W or min 1 / max 2 x1,7W
	not dimmable
	dimensions 4x2,7x2,1 cm




INSTRUCTIONS FOR THE CONNECTION OF MULTIPLE LAMPS RECESSED FOR PLASTERBOARD
WALL/CEILING PEPITA 65 / PEPITA 102

1.

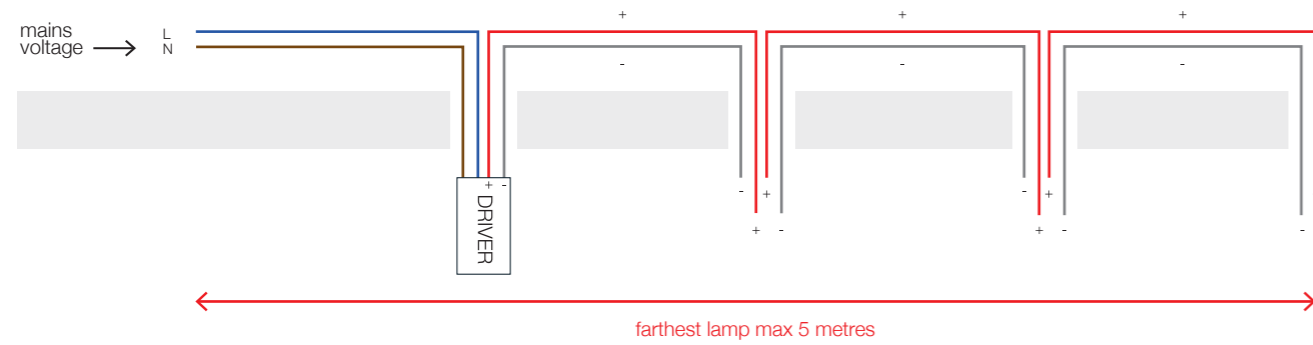


it is recommended to respect the polarity

2.

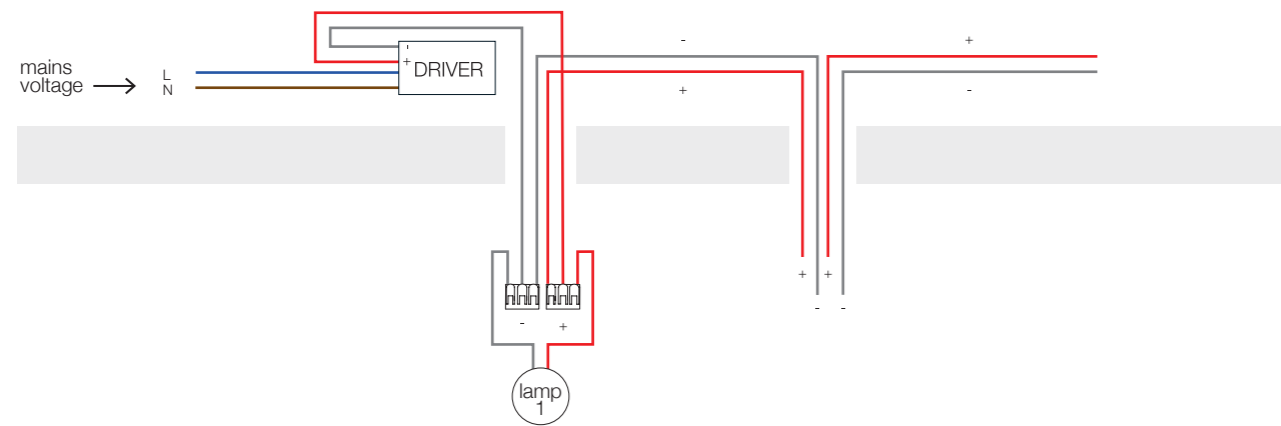

3.

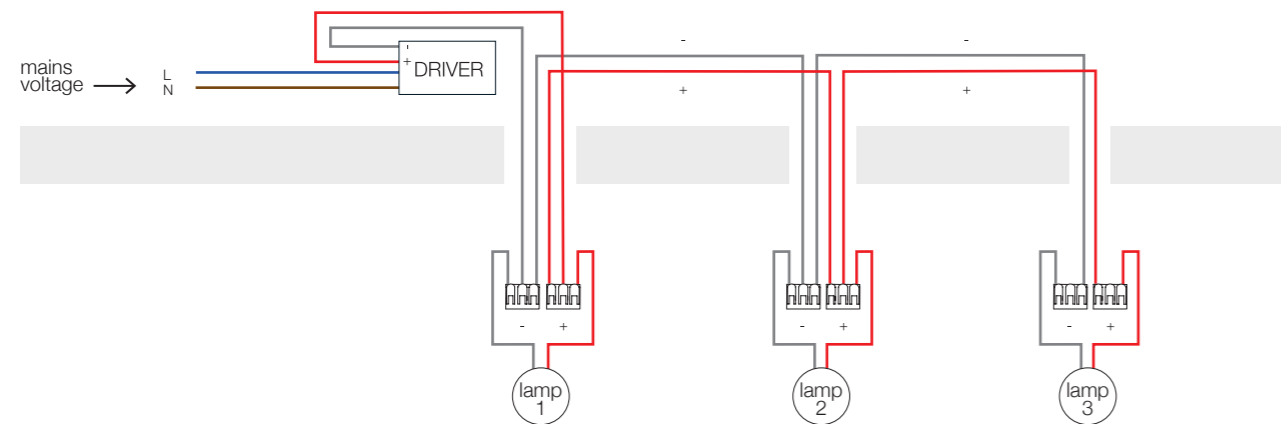

the cable between the lamps is not supplied,
it is recommended to use one with a minimum section of conductors of 1 mmq



DIMMING WIRING DIAGRAMS

Diagram 1 - IGBT - TRIAC

— 1 wire for power supply
— 1 wire for dimming

WARNING: Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

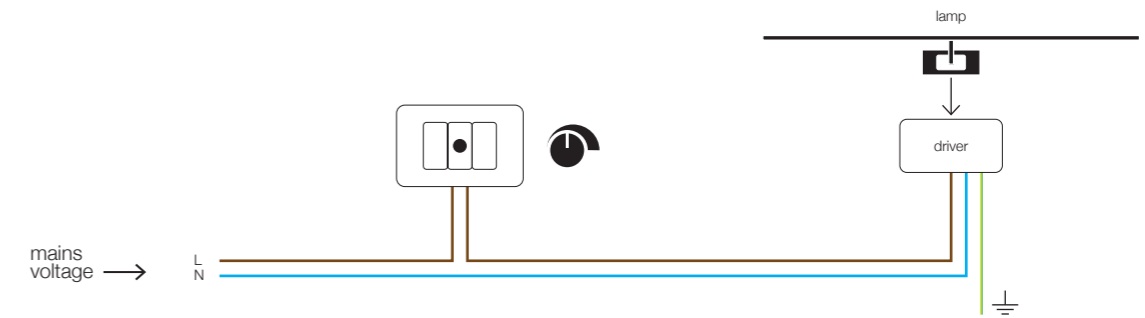


Diagram 2 - PUSH

— 2 wires for power supply
— 2 wires for dimming

WARNING: you need two extra wires, marked in red, in order to dim.


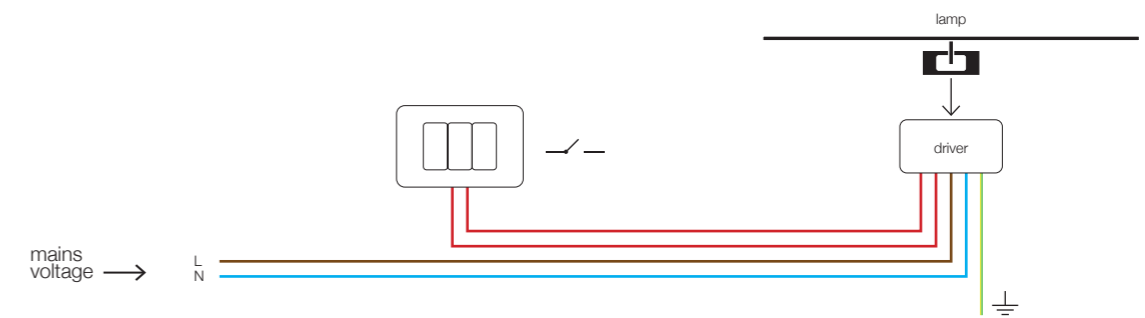


Diagram 3 - 1...10V - DALI / DALI2

— 2 wires for power supply
— 2 wires for dimming

WARNING: you need two extra wires, marked in red, in order to dim.

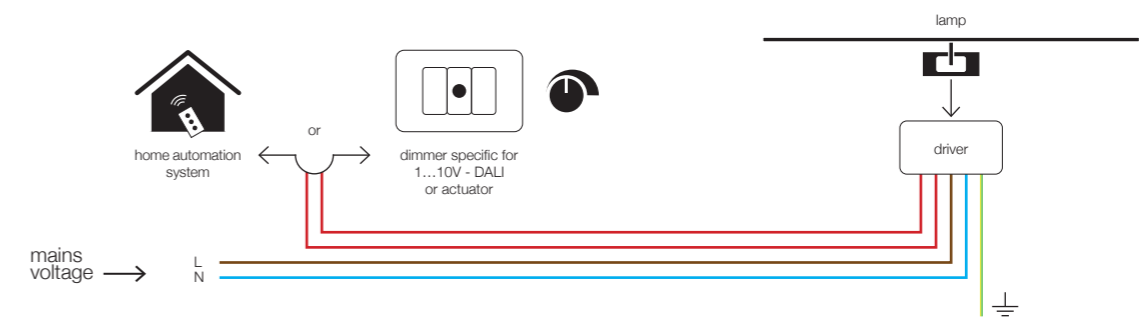

Catellani & Smith

Offices

via Cimitero 1/A
I-24020 Villa di Serio, BG
T. +39 035 656088
info@catellanismith.com

Showrooms

Bergamo
Via Borfuro, 1 Bergamo
T. +39 035 210193
show-room@catellanismith.com

London
Ltd. 7-15 Rosebery Ave Clerkenwell
London EC1R 4SP, U.K.

www.catellanismith.com



Catellani & Smith®